




IC110 Wall Mount Distribution

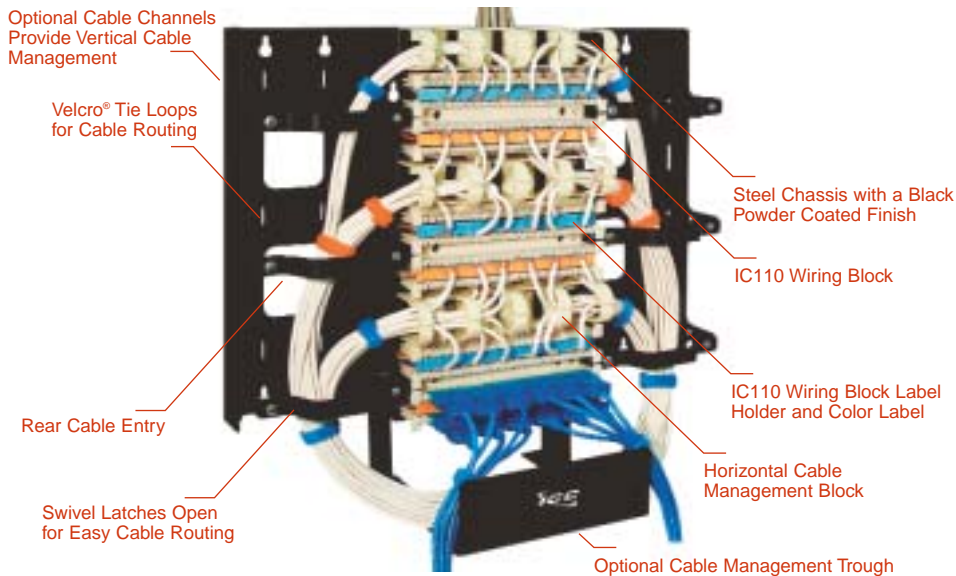

Installation Benefits

- Provides High Density Modularized 110 System
- Strong and Durable Steel Construction for Long Lasting Use and can be Stacked Together when Needed
- Complete with All Necessary Accessories, Labeling and Mounting Hardware
- Available as a Kit or as Individual Items

IC110 Wall Mount Distribution Tower Kit

Distribution tower includes all components necessary for terminating, labeling and wall mounting 110 products in a stacked configuration and up to 300-pair connections.

PART NUMBER	DESCRIPTION
IC110TK300	Tower Frame, 100-Pair Wiring Block (3 ea.), Cable Management Block (3 ea.), Connecting Block 4-Pair (60 ea.) and 5-Pair (12 ea.), Label Holder (2 ea.) and Label (2 ea.)



HiPerlink **IC110TK300**

IC110 Wall Mount Distribution Tower Frame

Frame is made of black powder coated CRS steel, designed to securely hold all components during and after termination.

PART NUMBER	DESCRIPTION
IC110TO300	Tower Frame



IC110TO300

IC110 Wall Mount Distribution Tower Cable Channel

Channel features swivel latches and cable tie anchoring points for vertical cable management.

PART NUMBER	DESCRIPTION
IC110TOCCH	Tower Cable Channel



IC110TOCCH

IC110 Wall Mount Distribution Tower Cable Trough and Ring

Cable management is designed to mount below the frame and support cable routing. The cable management ring mounts on the side of the frame to provide flexibility for vertical cable management.

PART NUMBER	DESCRIPTION
IC110TOCMT	Tower Cable Management Trough
IC110TOCMR	Tower Cable Management Ring



IC110TOCMT

IC110TOCMR

