

# 12 Channel Audio Amplifier


## A1260/A1260R

The A1260 (and the A1260R rack-mountable version) provide installers with a high-quality 12 channel amplifier that is perfect for multi-zone distributed audio applications. Designed to complement the A4600 A/V Pre-Amplifier Matrix, this six-zone amplifier offers plenty of power, clean sound, and reliable performance to satisfy the most discerning audio and home theater enthusiasts.


### Features:

- Each zone may be switched between the global input and the local input.
- Sources connected to Global input can be heard in all 6 zones.
- 110-120 or 220-240 operation.
- Each channel has independent turn-on sensors.
- Torroidal power transformer with 4 secondaries to maximize separation.
- Computer-grade components throughout to ensure long-life.
- High Current Circuitry.

### A1260

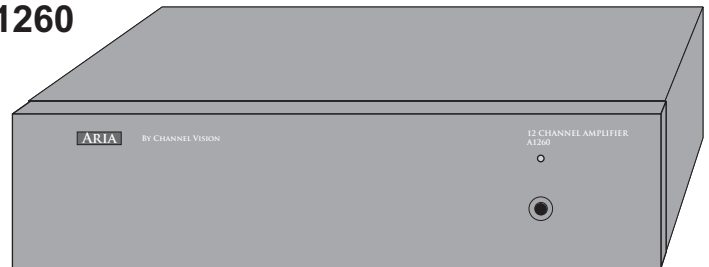

### A1260R

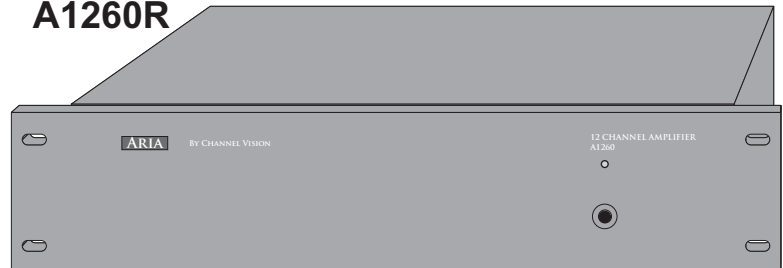

### Specifications: (Typical @25 degrees C)

<b>Output Frequency Range:</b>	20-20kHz
<b>Output Level:</b>	60 W/ch 8ohms 60 W/ch 4 ohms (With 120VAC or AC 240VAC)
<b>Turn on delay:</b>	< 500msec
<b>Turn off delay:</b>	~ 30-100 seconds
<b>THD:</b>	< .1% @ 1kHz
<b>Dimensions:</b>	5.5" x 14.25" x 17.0" (Faceplate on A1260R is 19.0")
<b>Power Consumption:</b>	< 35 W (no input)
<b>Operating Temperature:</b>	-10 degrees C to +60 degrees C
<b>AC fuse:</b>	10A Slo-blo 5x20mm



## CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626  
(714) 424-6500 • (800) 840-0288 • (714) 424-6510 fax  
www.channelvision.com • email: sales@channelvision.com

