



Note: Shown in two sections for illustrative purposes, actual product is one piece.

TELCO-Style Cable Runway

Similar in construction to our Universal Cable Runway (10250 Series). The side stringers are 1 1/2" x 3/8" x .065" (38 mm x 9.53 mm x 1.65 mm) and the cross members are 1/2" x 1" x .065" (12.7 mm x 30 mm x 1.65 mm) welded at 9" (230 mm) intervals.

- The overall length is 9' 8-1/2" / 116.5" (2959 mm) or 4' 5-1/2" / 53.5" (1359 mm) to comply with TELCO-Style standards
- Individually boxed to prevent scratching and damage
- Installation Best Practices includes Runway Elevation Kit (page 6-19)

| Part Number/Color | | | Width (Dim. A) in (mm) | Length (Dim. B) in (mm) |
|-------------------|-----------|-----------|---------------------------|----------------------------|
| Gray | White | Black | | |
| 11252-106 | 11252-206 | 11252-706 | 6 (150) | 9' 8-1/2 (2959) |
| 11252-109 | 11252-209 | 11252-709 | 9 (230) | 9' 8-1/2 (2959) |
| 11252-110 | 11252-210 | 11252-710 | 10 (250) | 9' 8-1/2 (2959) |
| 11252-112 | 11252-212 | 11252-712 | 12 (300) | 9' 8-1/2 (2959) |
| 11252-113 | 11252-213 | 11252-713 | 12 (300) | 4' 5-1/2 (1359) |
| 11252-115 | 11252-215 | 11252-715 | 15 (380) | 9' 8-1/2 (2959) |
| 11252-118 | 11252-218 | 11252-718 | 18 (460) | 9' 8-1/2 (2959) |
| 11252-120 | 11252-220 | 11252-720 | 20 (510) | 9' 8-1/2 (2959) |

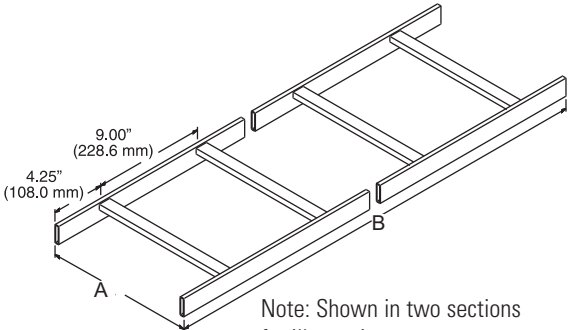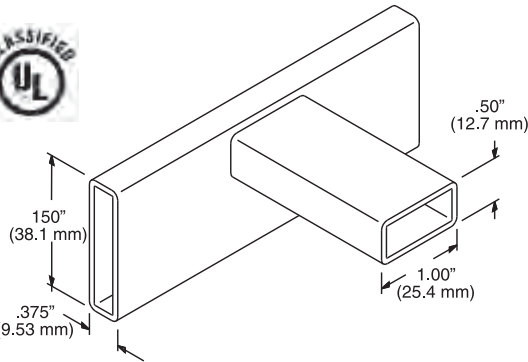

Note: Shown in two sections for illustrative purposes, actual product is one piece.

UL Classified Cable Runway

Similar in construction to our TELCO Style Cable Runway (11252 series). The side stringers are 1 1/2" x 3/8" x .065" (38.1 mm x 9.53 mm x 1.65 mm) and the cross members are 1/2" x 1" x .065" (12.7 mm x 30 mm x 1.65 mm) welded at 9" (230 mm) intervals.

- Color is Gold chem film over zinc plating or black chem
- Underwriters Laboratory Classified for suitability (as an equipment grounding conductor only)
- The overall length is 9' 8-1/2" / 116.5" (2959 mm) to comply with TELCO-Style standards
- Individually boxed to prevent scratching and damage
- Installation Best Practices includes Runway Elevation Kit (page 6-19)

| Part Number | Width (Dim. A) in (mm) | Length (Dim. B) in (mm) | Shipping Weight lb (kg) |
|-------------|---------------------------|----------------------------|----------------------------|
| 11275-X06 | 6 (150) | 9' 8-1/2 (2959) | 19 (8.6) |
| 11275-X09 | 9 (230) | 9' 8-1/2 (2959) | 20 (9.1) |
| 11275-X12 | 12 (300) | 9' 8-1/2 (2959) | 22 (10.0) |
| 11275-X15 | 15 (380) | 9' 8-1/2 (2959) | 26 (11.8) |
| 11275-X18 | 18 (460) | 9' 8-1/2 (2959) | 28 (12.7) |
| 11275-X20 | 20 (510) | 9' 8-1/2 (2959) | 29 (13.2) |
| 11275-X24 | 24 (610) | 9' 8-1/2 (2959) | 31 (14.1) |

X=color over zinc: 0=Gold, 7=Black