


All-Call and Chime Adaptor

Master Sentry Series

BG-10C provides All-Call and Chime functions for the Master Sentry System when the AM/FM Control & Music Center (BGR-10A) is not included.

FEATURES/FUNCTIONS

- All-Call from any LEF-C master station or LEF-10S surface mount master.
- Selective distribution of music and/or chime.
- Built-in amplifier.
- Auxiliary music input for connection of CD or tape player.
- Separate volume controls for music, chime and All-Call.
- Bass and treble controls for music.
- Four-stroke electronic chime from up to three door stations.

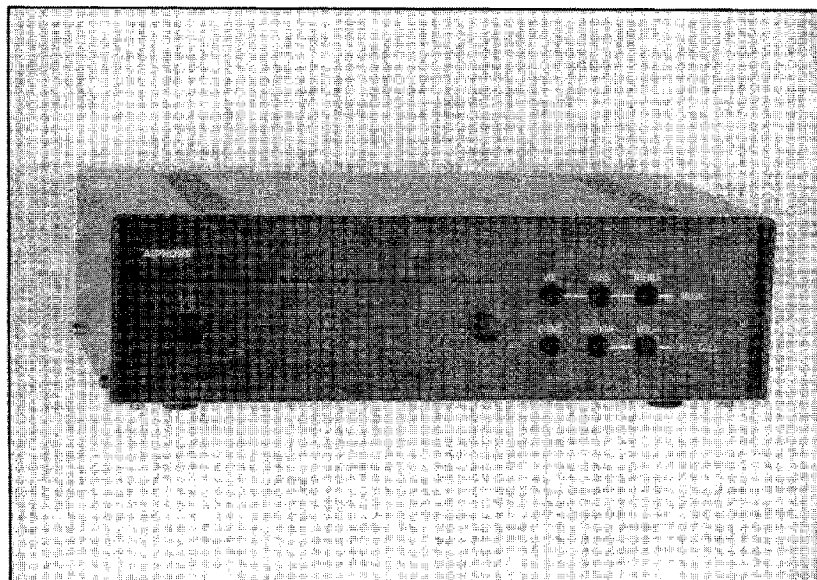

BG-10C APPLICATIONS

- Homes
- Retail Businesses
- Offices
- Medical Offices

SPECIFICATIONS (Subject to change without notice)

Power Source	DC 12V, Use PS-12F (Powers the entire LEF-C system and the BG-10C.)
Current Consumption	Maximum 2.5A (Music, Chime & All-Call) 0.1 A (standby)
Dimensions	6-1/2" H x 10" W x 3" D
Wiring Requirements	Multi-conductor with an overall shield. Maximum 20 Conductors. (For specific wiring instructions, please consult your installation manual.)
Wiring Distance	(Between BG-10C and the furthest LEF) 22 AWG = 500 feet 18 AWG = 1180 feet

Aiphone Corporation
1700 - 130th Ave. N.E.
Bellevue, WA 98005
(206) 455-0510
FAX: (206) 455-0071

Communication systems for business, home and industry.

TOLL-FREE TECHNICAL DEPARTMENT
FAX LINE: (800) 832-3765



AIP92490