


SSP-361 Telephones

Stainless Steel Panel, Vandal Resistant, Rugged Telephones Built to Last

The CEECO 361 Series stainless steel panel telephones are designed for use in public areas that may be subject to high use or abuse. The telephones' rugged design is for flush mount installation and includes the rough in mounting box. The SSP-361 telephones are equipped with an armored cord, hearing aide compatible handset, marine quality chrome hookswitch and keypad (F model), and security hardware for installation. CEECO's SSP-361 Series flush mount telephones offer dependable communication built to last.

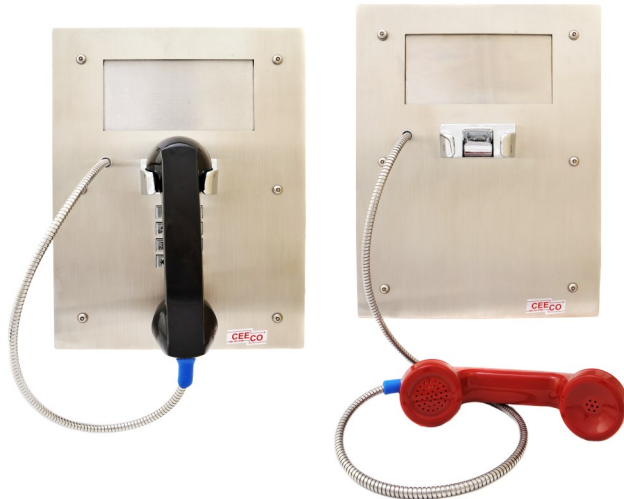

FEATURES

- **Vandal Resistant, Stainless Steel Construction with Security Hardware**
- **Flush Mount Panel with Rough-In Mounting Box Included**
- **Marine Quality Chrome Keypad and Hookswitch, and Armored Cord Handset**
- **Available in Autodial, Ring-down, Keypad (Dial), or Call Restriction Capabilities**
- **Measurements:
Panel: 13 1/8" h x 10 1/8"w
Box: 11 1/2" h x 8 1/2" w x 2 5/8" d**
- **Line Powered**
- **1 Year Warranty**

MODELS

- IP-** Voice over Internet Protocol Version.
- SSP-361-D** Vandal resistant, stainless steel, flush mount panel telephone with instruction window, automatic dialer, 32" armored cord handset, and rough in mounting box.
- SSP-361-F** Vandal resistant, stainless steel, flush mount panel telephone with instruction window, chrome tone keypad, 32" armored cord handset, and rough in mounting box.
- SSP-363-F** Vandal resistant, stainless steel, flush mount panel telephone with instruction window, chrome tone keypad, call restrictions and speed dial software, 32" armored cord handset, and rough in mounting box.
- SSP-361-X** Vandal resistant, stainless steel, flush mount panel telephone with instruction window, ring-down operation, 32" armored cord handset, and rough in mounting box.
- BR** Equipped with Braille emergency plate.
- PBVC** Push button volume control handset.
- C** Noise reduction (confidencer) handset.
- M** Magnetic Hookswitch. Standard hookswitch is mechanical.
- ACH**** Different length handsets available. Example: SSP-561-X-ACH72 (telephone with 72" length handset). Handsets available in black (standard), red, and white.
- 301-037** Security tool, required for installation.



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

<http://www.ceeco.net>

Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006

SPECIFICATIONS

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST

SPECIFICATIONS

INPUT POWER: C.O. Line Powered

LOOP CURRENT: 23ma min to 80ma max

IMPEDANCE: 600 ohms

SIGNALING: DTMF, 70ms tone, 50ms spacing

HEARING AID

COMPATIBLE: Meets EIA standards

ENVIRONMENTAL: Temperature: -30°C (-22°F) to 90°C (194°F)

Humidity 0%-90% non-condensating

TELEPHONE COVER: 14 ga. Stainless Steel

DIMENSIONS: 10.25" wide x 13.125" high x 2.625" deep

MOUNTING: Apparatus Box

WEIGHT: Apx. 8 lbs.

UL LISTED NO.: 60F5

RINGER EQUIVALENCY: 0.4A

TYPE JACK: RJ11C

CEEEO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEEEO also offers custom design and branding to your specifications.

Our commitment to providing expert service and support extends beyond the warranty of our product. We offer service for the life of the product! CEEEO is devoted to giving you the quality and service you deserve.

WARRANTY POLICY

GENERAL

CEEEO guarantees its products to be free from defects in material and workmanship for a period of 365 days from the date of original purchase. CEEEO's obligation under this warranty is limited to repair or replacement of any part found to be defective by CEEEO.

UNDER NO CIRCUMSTANCES shall CEEEO be liable for loss, damage, cost of repair or consequential damages of any kind, which have been caused by neglect, abuse or improper operation of equipment.

CEEEO will repair or replace any unit during this period if found to be defective for reasons other than abuse and improper use or improper installation. It is the buyer's responsibility to return the defective unit to the factory. CEEEO will then repair or replace any defective parts and return them to the buyer free of charge. CEEEO supplies replacement parts and offers repair service for the life of the product.


REPAIR POLICY

WARRANTY REPAIR

Any device returned requiring warranty service, repair or credit must be accompanied with a "Return Material Authorization" (RMA) Form. It must include: RMA Number, return shipping instructions, original purchase order number, serial number and special marking instructions. A tag with the trouble observed must be attached to the defective unit. This information must be inside the shipping container.

NON-WARRANTY REPAIR

CEEEO will repair equipment out of warranty for a set charge plus parts. The customer must pay the shipping costs both directions.

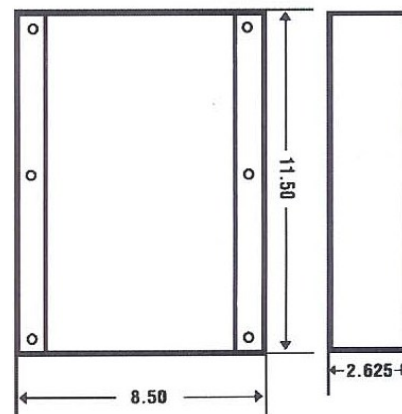

MOUNTING BOX

Providing Telecommunication Solutions Since 1930



Communication Equipment
& Engineering Company

<http://www.ceeco.net>

Email: sales@ceeco.net

519 SW Park Street

Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006