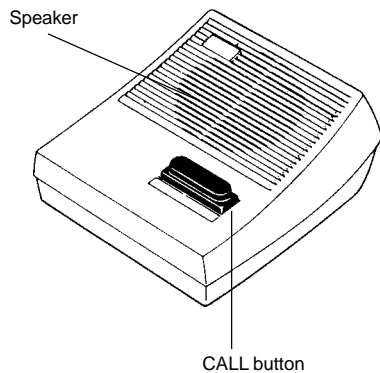


AS-Series Sub Stations

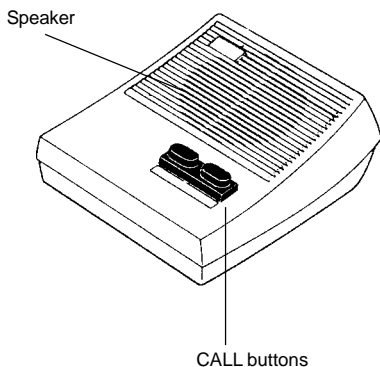
For use with AP-M and MP-S Systems

AS-3A**AS-3A FEATURES:**

- Push button to call master station
- Call-in activates tone at master
- Call-in LED remains activated for 20 seconds after call button is released (MP-3S, AP-5M/10M only)
- Hands free communication when master answers
- Desk or wall mount (to 1-gang box or ring)

COMMON SPECIFICATIONS:

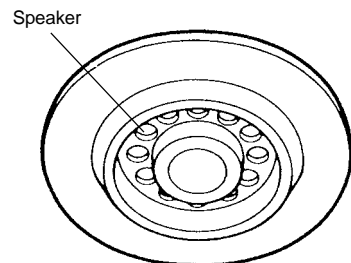
System: AP-M or MP-S
Speaker: 20 ohms
Communication: Hands free at sub
Conductors: 1 pair homerun per sub
Use Aiphone wire #832202
Wiring Distance: AP-M: 490' w/22AWG; 1200' w/18AWG
MP-S: 330' w/22AWG; 720' w/18AWG
Dimensions: 7" x 5-13/16" x 3-1/16" (H x W x D)

AS-3WA**AS-3WA FEATURES:**

- Dual call buttons allow independent calling of masters in a dual master system (AP-M only)
- Call-in activates tone and light at master
- Call-in LED remains activated for 20 seconds after call button is released (AP-5M/10M only)
- Hands free communication when master answers
- Desk or wall mount (to 1-gang box or ring)

Common Specifications, plus:

Calling: 2 buttons, selectively calling each master
Wiring: 1 pair homerun to *each* master station
Use Aiphone #832202 (x2)

AS-3N**AS-3N FEATURES:**

- Overhead hands free communication with master station
- Remote push button to call master station (optional)
- Call-in activates tone and light at master
- Call-in LED remains activated for 20 seconds after call button is released (MP-3S, AP-5M/10M only)
- Flush mounts in ceiling with provided equipment

Common Specifications, plus:

Call button: Optional NP-B (with NP-W surface box if req'd)
Mounting: Flush mount in ceiling
Dimensions: 7-1/16" x 1-7/8" (Diameter x Depth)