




# Category 5 Patch Cords Custom Solutions

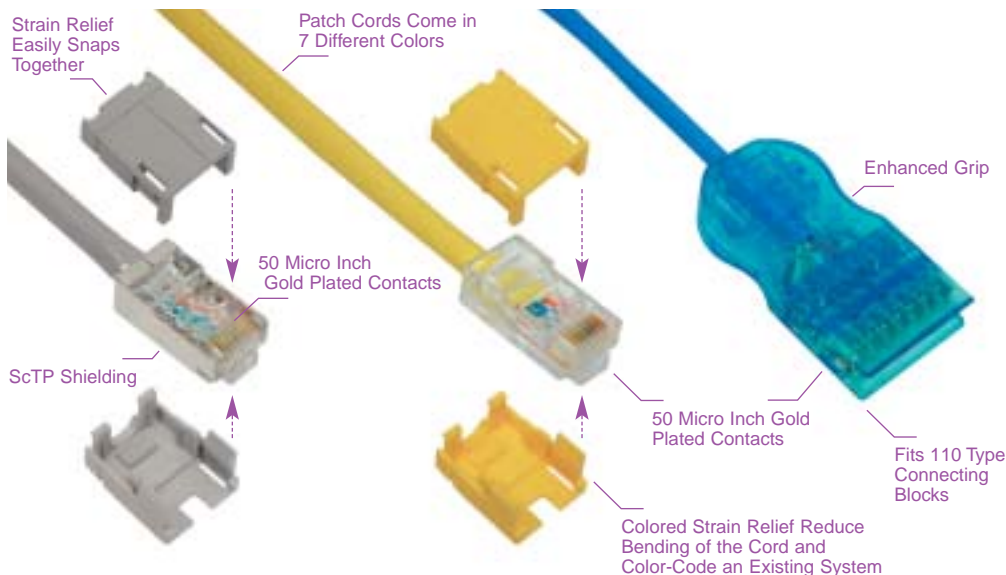

## Installation Benefits

- All Category 5 Patch Cords are T-568-A and T-568-B Wiring Compatible and 100% Tested
- Designed to Minimize Crosstalk and Maintain the Signal Integrity Needed for Today's High-Speed Networks



ICPCS503xx\*



## Category 5 Patch Cord

Category 5 patch cord comes with 26 AWG stranded 4 UTP cable and is designed without boot.

PART NUMBER	DESCRIPTION
ICPCS503xx*	3 ft., 4 UTP
ICPCS505xx*	5 ft., 4 UTP
ICPCS507xx*	7 ft., 4 UTP
ICPCS510xx*	10 ft., 4 UTP
ICPCS514xx*	14 ft., 4 UTP
ICPCS520BL	20 ft., 4 UTP
ICPCS525BL	25 ft., 4 UTP

\*xx = WH, GY, BK, BL, GN, RD, YL



ICPCSA03BL



## IC110 Patch Cord

This Category 5 IC110 patch cord is designed for T-568-A wiring with the IC110 cross-connect system.

PART NUMBER	DESCRIPTION
ICPCSA03BL	3 ft., IC110/8P8C
ICPCSA07BL	7 ft., IC110/8P8C
ICPCSA10BL	10 ft., IC110/8P8C



ICPCSS03GY



## ScTP Patch Cord

Category 5 ScTP patch cord is designed to maintain the shielding effectiveness against Electro-Magnetic Interference (EMI).

PART NUMBER	DESCRIPTION
ICPCSS03GY	3 ft.
ICPCSS07GY	7 ft.
ICPCSS10GY	10 ft.



ICPCSB03BL



## IC110 Patch Cord

This Category 5 IC110 patch cord is designed for T-568-B wiring with the IC110 cross-connect system.

PART NUMBER	DESCRIPTION
ICPCSB03BL	3 ft., IC110/8P8C
ICPCSB07BL	7 ft., IC110/8P8C
ICPCSB10BL	10 ft., IC110/8P8C



ICPCSSR8xx\*



## Colored Strain Relief

Strain relief applies to an 8 position patch cord plug, without boot, to reduce bending of the cord.

PART NUMBER	DESCRIPTION
ICPCSSR8xx*	Strain Relief, 10 pcs./bag

\*xx = IV, WH, GY, BK, BL, GN, OR, PR, RD, YL



ICPCSR03BL



## IC110 Patch Cord

Category 5 IC110 patch cord is designed for T-568-A and T-568-B wiring to be used with the IC110 cross-connect system.

PART NUMBER	DESCRIPTION
ICPCSR03BL	3 ft., IC110/IC110
ICPCSR07BL	7 ft., IC110/IC110
ICPCSR10BL	10 ft., IC110/IC110

