



# Closet Connector Housing Panels (CCH-CP)

A LANscape® Solutions Product

## features and benefits |

<b>Universal design approach</b>	One-size-fits-all LANscape® Solutions housings
<b>Broadest range of fiber count and adapter types</b>	Solutions for all needs
<b>Colored icon labeling</b>	Easy connector identification

Corning Cable Systems Closet Connector Housing Panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® Solutions hardware products for a “one-size-fits-all” approach. Used with factory-installed or field-installable connectors, these panels provide interconnect or cross-connect capability in a housing at main cross-connects, intermediate cross-connects, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® Connector adapters.

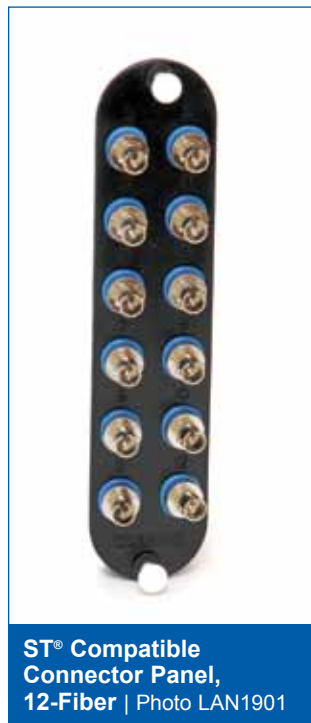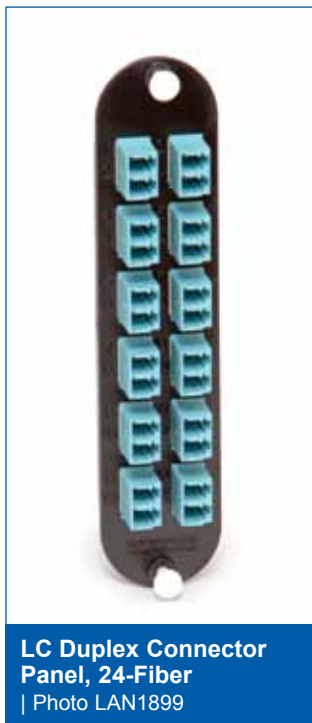

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

## ordering information |

CCH - CP   -    
|1 |2

|1

Select fiber count.

06 = 6 fibers  
08 = 8 fibers  
12 = 12 fibers  
16 = 16 fibers  
24 = 24 fibers  
36 = 36 fibers  
72 = 72 fibers  
96 = 96 fibers  
E4 = 144 fibers

See Note 1.

|2

Select adapter code  
(see Adapter/Connector  
Code Options table on  
following page).

Note:

1) Fiber count for desired adapter  
is available in table on following  
page.

## Part Number Example

Part Number	Description
CCH-CP12-A9	Closet Connector Housing Pigtail Panel with 6 LC duplex single-mode adapters

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

adapter/connector code options |

Adapter Code	Fiber Type	Alignment	Housing	Fiber/Adapter	Available Fiber/Panel Counts								
					6	8	12	16	24	36	72	96	144
<b>LC Duplex</b>													
A8	62.5 µm multimode (OM1)	Ceramic	Composite	2	X	X	X	X	X				
D3	50 µm multimode (OM2)	Ceramic	Composite	2	X	X	X	X	X				
E4	50 µm multimode (OM3/4)	Ceramic	Composite	2	X	X	X	X	X				
A9	Single-mode, UPC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
B3	Single-mode, APC (OS2)	Ceramic	Composite	2	X	X	X	X	X				
<b>SC Duplex</b>													
91	62.5 µm multimode (OM1)	Metal	Composite	2	X	X	X						
G7	50 µm multimode (OM2)	Ceramic	Composite	2	X	X	X						
E7	50 µm multimode (OM3/4)	Ceramic	Composite	2	X	X	X						
59	Single-mode, UPC (OS2)	Ceramic	Composite	2	X	X	X						
D9	Single-mode, APC (OS2)	Ceramic	Composite	2	X	X	X						
<b>SC</b>													
56	62.5 µm multimode (OM1)	Metal	Composite	1	X	X	X						
G6	50 µm multimode (OM2)	Ceramic	Composite	1	X	X	X						
E6	50 µm multimode (OM3/4)	Ceramic	Composite	1	X	X	X						
3C	Single-mode, UPC (OS2)	Ceramic	Composite	1	X	X	X						
6C	Single-mode, APC (OS2)	Ceramic	Composite	1	X	X	X						
<b>ST® Compatible Connector</b>													
15T	62.5 µm multimode (OM1)	Ceramic	Metal	1	X	X	X						
G5	50 µm multimode (OM2)	Ceramic	Metal	1	X	X	X						
H3	50 µm multimode (OM3/4)	Ceramic	Metal	1	X	X	X						
19T	Single-mode, UPC (OS2)	Ceramic	Metal	1	X	X	X						
<b>FC</b>													
11	Single-mode, UPC (OS2)	Metal	Metal	1	X	X	X						
21	Single-mode, APC (OS2)	Metal	Metal	1	X	X	X						
<b>MT-RJ</b>													
97	62.5 µm multimode (OM1)	N/A	Composite	2		X	X	X	X				
G1	50 µm multimode (OM2)	N/A	Composite	2		X	X	X	X				
E1	50 µm multimode (OM3/4)	N/A	Composite	2		X	X	X	X				
98	Single-mode, UPC (OS2)	N/A	Composite	2		X	X	X	X				
<b>MTP® Connector</b>													
69	62.5 µm multimode (OM1)	N/A	Composite	12						X	X	X	X
G3	50 µm multimode (OM2)	N/A	Composite	12						X	X	X	X
E3	50 µm multimode (OM3/4)	N/A	Composite	12						X	X	X	X
90	Single-mode (OS2)	N/A	Composite	12						X	X	X	X
<b>Fiber Type</b>		<b>Housing Color, Simplex and Duplex</b>			<b>Housing Color, MTP</b>								
62.5 µm multimode (OM1)		Beige			Black								
50 µm multimode (OM2)		Black			Black								
50 µm multimode (OM3/4)		Aqua			Aqua								
Single-mode, UPC (OS2)		Blue			Black								
Single-mode, APC (OS2)		Green			Black								

# Closet Connector Housing Panels (CCH-CP)

A LANscape®  
Solutions Product

ordering information | (continued)

**Colored Icons** (pack of 50)

ICN -     
|1

|1

Select icon.

### Blank Icons



YLB = Blank (Yellow)  
RDB = Blank (Red)  
GRB = Blank (Green)  
BLB = Blank (Blue)  
WTB = Blank (White)  
BGB = Blank (Beige)  
ORB = Blank (Orange)

### Etched Icons



BLP = Phone (Blue)



RDC = Computer (Red)



GRT = Cable TV (Green)

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/cablesystems](http://www.corning.com/cablesystems)

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape is a registered trademark of Corning Cable Systems Brands, Inc. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. ©2007, 2012 Corning Cable Systems. All rights reserved. Published in the USA. LAN-133-EN / February 2012