

INSTRUCTIONS

Specifications:

Image Sensor:	Sony 1/3" Super HAD
Picture Elements:	NTSC: 510x492
Resolution:	380 lines
S/N Ratio:	More than 48 dB
Min Illumination:	0.2 LUX @ F2.0
Electronic Shutter:	1/60s - 1/100,000s
Gain Control:	Automatic
Auto White Balance:	Color Temperature: 2500K-9500K
Gamma Characteristic:	0.45
Camera Lens:	3.6mm / F2.0
Sync. System:	Internal, Negative sync.
Power Requirements:	12VDC
Power Consumption:	145 mA
Video Output:	1 Vp-p @ 75 ohms
Operating Temp:	-10°C to 50°C (14°F to 122°F)

Specifications subject to change without notice.

CHANNEL VISION Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for two years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

500-139 rev B



6115 Small Outdoor Color Dome Camera




 CHANNEL VISION™
©2008 CHANNEL VISION TECHNOLOGY

Model 6115


The **6115** is a small outdoor color dome camera. It is perfect for CCTV applications that require mounting flexibility. Its small size and unobtrusive design make it perfect for residential use.

Features:

- High quality 1/3" Sony Super HAD CCD sensor
- Digital Signal Processor (DSP) chip-set provides image control
- High sensitivity, low smear, high anti-blooming and high S/N ratio
- Automatic Gain Control (AGC) and Auto White Balance (AWB)
- 3-Axis mechanism for easy rotation and adjustment

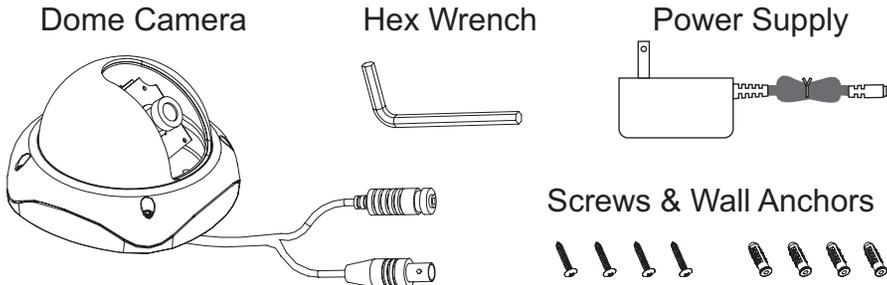


Adjusting the 3-Axis Mount

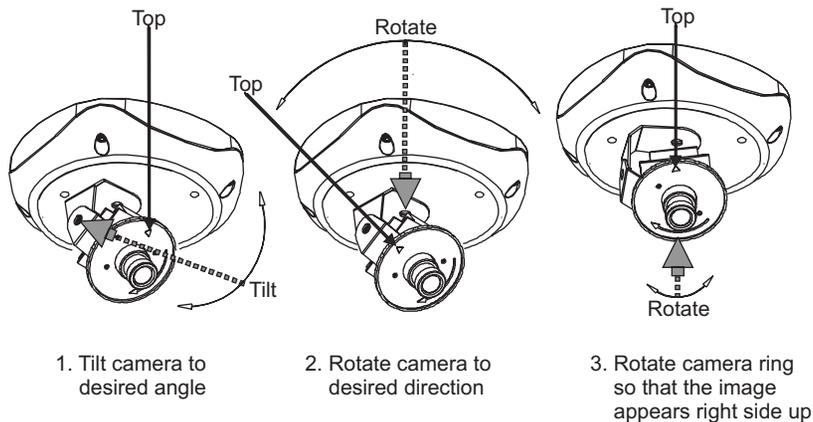

1. Connect wiring
2. Mount base

3. Adjust camera (see page 2)
4. Attach dome

Finished

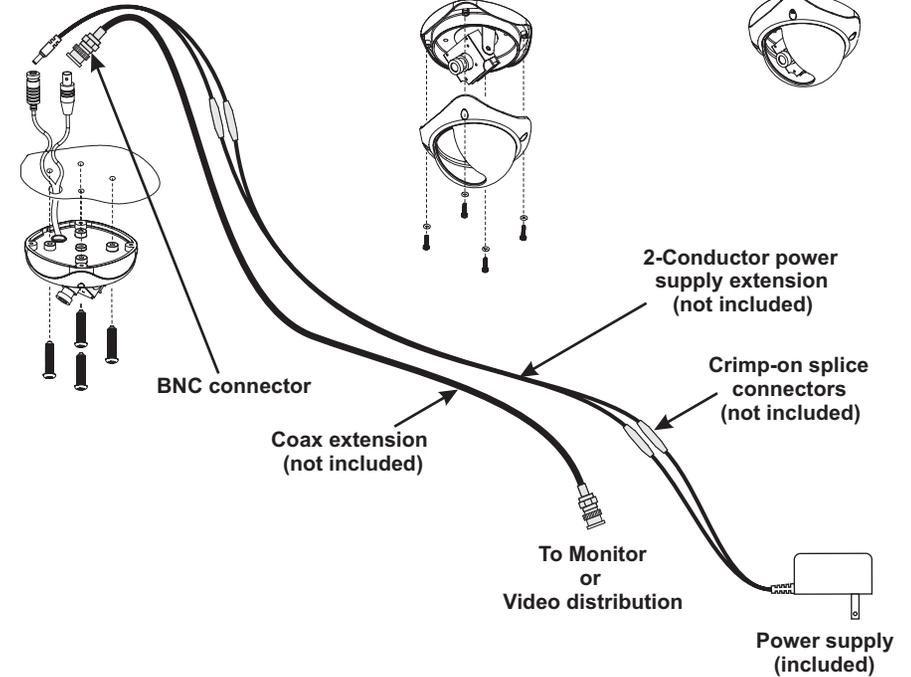

Installation:

- Use the hex wrench to remove the dome cover from the base.
- Drill a hole in the wall or ceiling for wiring (see diagram).
- If necessary, attach the camera's video output to a coax extension that is long enough to reach your monitor or video distribution equipment.
- If necessary, cut the connector off of the end of the power supply and splice in an extension using crimp-on connectors.
- Mount the base with the provided screws.
- Move the camera body to adjust the view.
- Attach the dome and secure it with the hex wrench.