

ToggleTouch™ Toggle Digital Preset Touch Dimmer 120V 60Hz AC Only
 All ToggleTouch™ Preset Dimmers provide single-pole (one-location) and 3-way (multi-location) control when used with a 3-way switch, except where noted.

DESCRIPTION	CAT. NO.	RATING	COLOR*
ToggleTouch Incandescent (No LED locator, single-pole only)	TGI06-10	600W	W, I, A
ToggleTouch Incandescent	TGI06-1L	600W	W, I, A, B
ToggleTouch Incandescent	TGI10-1L	1000W	W, I, A, G
ToggleTouch Magnetic Low-Voltage	TGM10-1L	1000VA	W, I, A, G

All items are UL Listed and CSA Certified

Note: Leviton does not recommend using the ToggleTouch Dimmer with metal wallplates.



TGI06-1LW

- Use with Leviton DPSPE-112 Power Extender to extend 120V load capacity to 2000W (2000VA) for incandescent, magnetic low-voltage and Advance Mark X™ fluorescent dimming ballasts.
- Use with Leviton DPSPE-212 Power Extender to extend 120V load capacity to 2000VA for Advance Mark VII™ and OSRAM Sylvania Quicktronic® Helios™ fluorescent ballasts.

Digital Lighting and Fan Speed Controls are polarity sensitive devices. Always follow the wiring instructions included with each device. They can be used in conventional 3-way and 4-way wiring circuits only when the Control is properly connected to the load as indicated by the device's wiring instructions.

SPECIFICATIONS & FEATURES

- Provides a unique combination of toggle-style ON/OFF switching and digital Touch Pad technology
- Designed for smooth ON/OFF toggle action and fingertip-control touch dimming that's easy to operate
- Provides single-pole (one-location) and multi-location 3-way control when used with a 3-way switch
- Fits perfectly with Leviton standard toggle wallplates; gangs perfectly with all Leviton toggle switches
- Provides preset dimming with soft-ON feature (does not provide fade OFF)
- Available with Locator LED that is illuminated when lights are OFF
- Protected memory during temporary power failures ensures that ToggleTouch will retain last setting before power interruption
- Built-in radio/TV interference filter

TESTING & CODE COMPLIANCE


- UL Listed (File #E-31373)
- CSA Certified (File #LR-3413)
- Backed by a Limited Two-Year Warranty

*COLOR

Add suffix to catalog number as follows for other colors: Brown (-B), Ivory (-I), White (-W), Gray (-G), and Almond (-A).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
 Operating Temperature: 32°F to 130°F

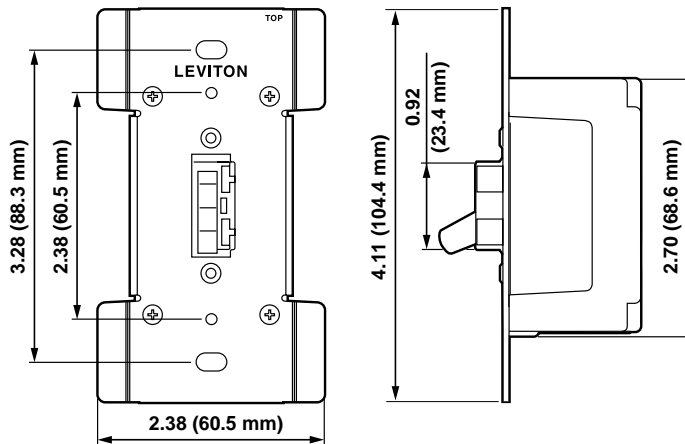

TOGGLETOUCH DIGITAL PRESET TOUCH DIMMER
 Cat. No. TGI06-1LW

