

Commercial Grade




Back and Side Wired Momentary Contact 15 AMP 120/277V AC

| DESCRIPTION | CAT. NO. | COLOR* |
|---------------------------------------|----------|--|
| Single Pole, Double Throw, Center OFF | 5657-2 | I, W, A, GY, E <small>Basic Cat. No. Denotes Mahogany</small> |

Back and Side Wired Maintained Contact 15 AMP 120/277V AC

| DESCRIPTION | CAT. NO. | COLOR* |
|---------------------------------------|----------|--|
| Single Pole, Double Throw, Center OFF | 5685-2 | I, W, A, GY, E <small>Basic Cat. No. Denotes Mahogany</small> |
| Double Pole, Double Throw, Center OFF | 5686-2 | I, W, A (No Mahogany) |

All devices are UL Listed and CSA Certified.

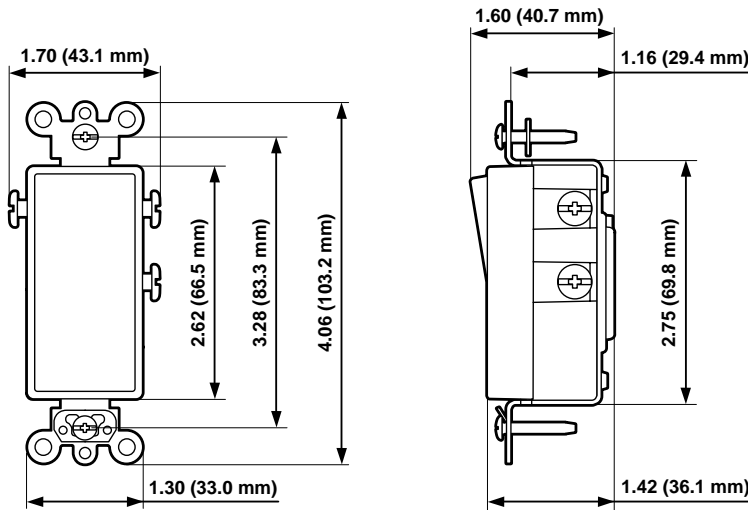

SINGLE POLE
Cat. Nos. 5657 and 5685

THESE DIMENSIONS APPLY TO ALL SWITCHES ON THIS PAGE

SPECIFICATIONS & FEATURES

- Full rated current capacity with tungsten, fluorescent or resistive loads. Motor capacity is 80% of switch rating
- Wrap-around heavy-gauge strap with locking tabs for added strength
- Back and side-wiring terminals accept both solid and stranded wire to ease installation

TESTING & CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)
- Meets requirements of latest Federal Specification WS-896
- Backed by a Limited 10-Year Warranty

*COLOR

Colors available as listed. For other color selections, add suffix to catalog numbers as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY), Black (-E).

HORSE POWER

15A
1/2 @ 120V
2 @ 240V

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: -40°C to 120°C



For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.