

DECORA PLUS Electronic Timer and Time Delay Switches



Commercial Grade

Decora Plus Electronic Timer Switches

Leviton Timers add contemporary styling to any commercial or residential application. Built to the highest performance standards, Decora Electronic Timers provide long-lasting trouble-free service life.

Four Preset buttons plus an OFF button permit timed control of lights and appliances. Decora Plus Timers are ideal for heat lamps, foyer and outdoor lights, hot tubs, spas, attic and exhaust fans. LED's indicate elapsed time and flash "Two Minutes Until OFF" warning.

Commercial Grade

Electronic Timer Switches 120V AC 60Hz

DESCRIPTION	CAT. NO.	INTERVAL	COLOR
Four Preset Buttons & OFF	6215M	2-5-10-15 Minutes	I, W, A
3-Wire, Single-Pole (Neutral Required)	6230M	5-10-15-30 Minutes	I, W, A
1000W Incandescent, 20A Inductive	6260M	10-20-30-60 Minutes	I, W, A
1 HP @ 120V	6212H	2-4-8-12 Hours	I, W, A

Residential Grade

Electronic Timer Switches 120V AC 60Hz

DESCRIPTION	CAT. NO.	INTERVAL	COLOR
Four Preset Buttons & OFF	6515M	2-5-10-15 Minutes	I, W, A
2-Wire, Single-Pole	6560M	10-20-30-60 Minutes	I, W, A
500W Incandescent Only	6512H	2-4-8-12 Hours	I, W, A

Residential Grade

Time Delay Switch (Incandescent Only) 300 WATT 120V AC

DESCRIPTION	CAT. NO.	COLOR
Single Pole, Five Minute Delayed OFF Switch	6690	I, W

All devices are UL Listed and CSA Certified.



6515M-W



6690-I

SPECIFICATIONS & FEATURES

- Electronic Timer Switch has four preset buttons plus OFF for timed control of lights and appliances.
- Electronic Timer Switch LED's indicate time elapsed and last LED flashes two minutes until OFF warning
- Press OFF button on Time Delay Switch — lights remain ON for 5 minutes before switching OFF
- All install easily in single gang wallbox in place of standard switch
- Electronic keypad control
- Matching wallplate included

TESTING & CODE COMPLIANCE


- UL Listed (File #E-66800—Cat. Nos. 6515M, 6560M, 6512H, 6215M, 6230M, 6260M, 6212H; File #E-7458—Cat. No. 6690)
- CSA Certified (File #LR-68679—Cat. Nos. 6515M, 6560M, 6512H, 6215M, 6230M, 6260M, 6212H; File #LR-67309—Cat. No. 6690)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

*COLOR

Colors available as listed. For color selections, add suffix to catalog numbers as follows: Ivory (-I), White (-W), Almond (-A).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: 32°F to 130°F

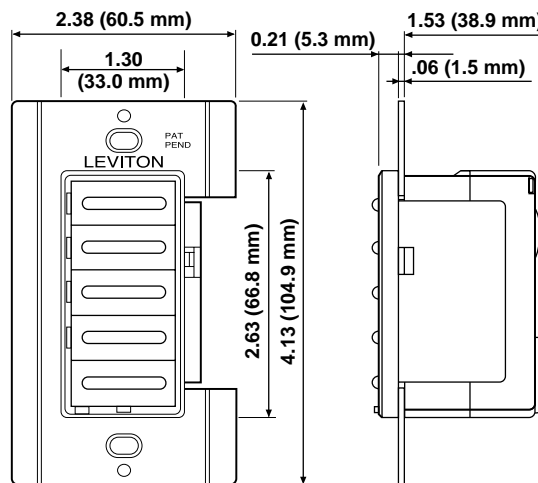

THESE DIMENSIONS APPLY TO ALL ELECTRONIC
TIMER SWITCHES ON THIS PAGE

For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.

