# FIBER STORAGE CENTER (FSC3)

Siemon's 3 RMS rack-mount Fiber Storage Center (FSC3) is typically utilized in tandem with a Rack Mount Interconnect Center (RIC3). Fiber jumpers exiting the front of a RIC are routed into the FSC3 for storage of excess cable slack. The enhanced design features new bend radius compliant managers which facilitate loading of jumpers and a new single-finger latch on door for easier access.

## ENHANCED



Mounting brackets can be - configured for mounting on a 19 or 23 inch rack

> Compact 3 RMS design (13.35cm [5.25 in.])



Top and bottom access

holes for cable feed-

The fiber management within the FSC3 is mounted on a tray that slides out the front of the cabinet to enable easy access to coiled cables

Enclosure is aluminum alloy

with black or white durable

Spring loaded quick release hinges enable easy removal of front and rear doors

Patented rotating grommets at both sides, front and rear, are designed to restrain cable and facilitate cable loading while minimizing microbending stress, particularly when utilizing the sliding tray

> FSC3 mounted to a 19 inch rack in tandem with a RIC3 (Rack Mount Interconnect Center)


FSC3 shown with storage tray slid out to access coiled cables

Enhanced bend radius compliant managers facilitate loading of jumpers






 $\bigcap$ 

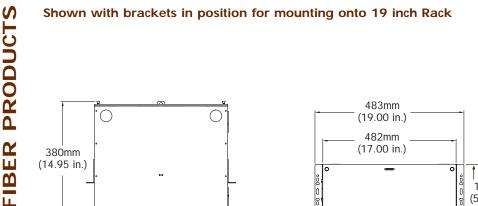

#### **Mounting Bracket Position Options**

-				
A		В		
mm	in.	mm	in.	
115	(4.53)	260	(10.24)	
153	(6.02)	222	(8.74)	
191	(7.52)	184	(7.24)	



### Fiber Storage Center (FSC3):

 $\bigcirc$ 

380mm

(14.95 in.)

FSC3-(XX).....Fiber Storage Center, 3 RMS

**Top View** 

**Related Products:** 

#### **Rack Mount Interconnect Center**

RIC3-24-(XX)	.24- to 96-port Rack Mount Interconnect Center, 2 RMS
	.36- to 144-port Rack Mount Interconnect Center, 2 RMS
RIC3-48-(XX)	.48- to 192-port Rack Mount Interconnect Center, 3 RMS
	.72- to 288-port Rack Mount Interconnect Center, 4 RMS

Use (XX) to specify color: 01 = black, 02 = white Note: 1 RMS = 44.5 (1.75 in.)

All Rack Mount Interconnect Centers include printable labels\*, cable ties, rack mounting hardware, installation instructions and pre-installed fiber management clips.

\*Visit our web site or contact our Technical Support Department for labeling software

Use (XX) to specify enclosure color: 01 = black, 02 = white

133mm

(5.25 in.)



Because we are continuously improving our products, The Siemon Company reserves the right to change specifications and availability without prior notice. LightSpeed<sup>®</sup> and XGLO<sup>™</sup> are trademarks of The Siemon Company

For related product information request Spec Sheet(s):

Rack Mount Interconnect Center (PROD-SS-RIC) Fiber Connect Panel (FCP2) (PROD-SS-FC2) LightSpeed<sup>®</sup> Jumpers & Pigtails (PROD-SS-FJ1) XGLO<sup>™</sup> Jumpers & Pigtails (PROD-SS-LOF) LightSpeed Termination Kit (PROD-SS-FTK)

The Americas Watertown, CT USA Phone (1) 860 945 4200

4()()

Europe/Middle East/Africa Surrey, England Phone (44) 0 1483 480040

483mm

(19.00 in.) 482mm

(17.00 in.)

Front View

lõ

10

Asia/Pacific Shanghai, P.R. China Phone (86) 21 6390 6778



WWW.SIEMON.COM



