

BLADE INSTALLATION AND REMOVAL

Align and insert blade; rotate 1/4 turn.
To remove blade, reverse 1/4 turn and pull away from handle.


SETTING IMPACT FORCE

Rotate Impact Knob to "LO" for 110 connectors and 24 AWG conductors.

Rotate Impact Knob to "HI" for Giga-Punch™ connectors and 22 gauge and larger gauge conductors.

The wire is properly seated after snap action in the the handle is activated.

The blade can be reversed if the wire is not to be cut upon installation.

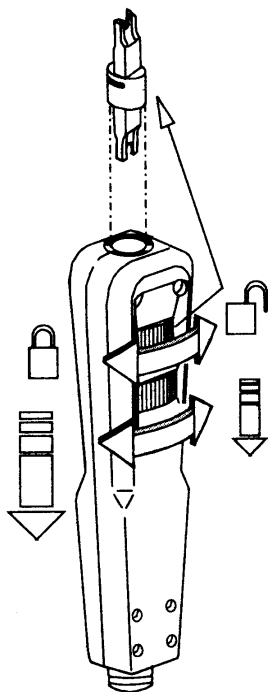

BLADE STORAGE

Insert blade in hole, rotate release knob to drop the blade in place. Release knob to lock blade in place.

To remove the blade, invert tool and rotate release knob.

BLADE REPLACEMENT PART NUMBERS

PART NO. DESCRIPTION

PDTH110 PAN PUNCH 110 REPLACEMENT BLADE

GPDTB GIGA PUNCH™ ONE PAIR REPLACEMENT BLADE

