




Hammer-On C & Z Purlin Rod Clip

for 1/4" and 3/8" rod

Features


- Used to support 1/4" and 3/8" threaded rod from purlin beam flanges 1/16" to 1/4" thick
- Requires only a hammer to install
- Thread impression eliminates the use of nuts
- Open style back offers unlimited rod adjustment

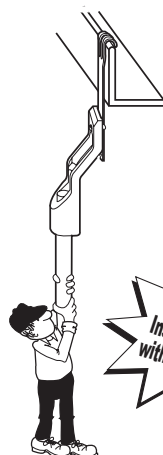

**Hammer-on or
Install from the Floor
with the New Vaft Tool**


INSTALLATION TOOLS

Use any of the tools below



Vaft Tool

Hammer

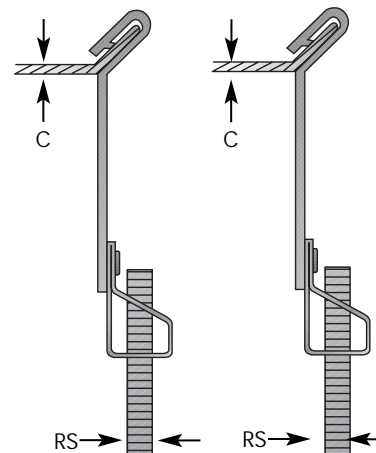

Recommended for support of up to 2" stationary pipe only.

Catalog #	C	RS	Finish*	Box/Case Qty.	Load Limit (lbs)
AF144TI	1/16" - 1/4"	1/4" - 20	ZP	100/600	100
AF146TI	1/16" - 1/4"	3/8" - 16	ZP	100/600	100
VF144TI	1/16" - 1/4"	1/4" - 20	ZP	100/1000	160
VF146TI	1/16" - 1/4"	3/8" - 16	ZP	100/600	160
VAFT	N/A	-	-	1	-

Rod Clip with Bracket

for 1/4" and 3/8" rod

Features

- Used to support 1/4" or 3/8" threaded rod from wood or concrete beams, joist, ceilings and walls. Mounting hole for 1/4" bolt.
- Available with either right angle or offset bracket.
- Thread impression eliminates the use of nuts.
- Open style back offers unlimited rod adjustment.

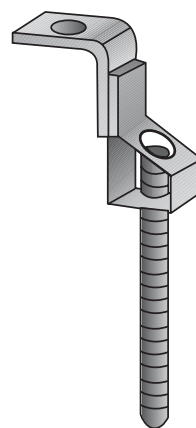


Fig. 1

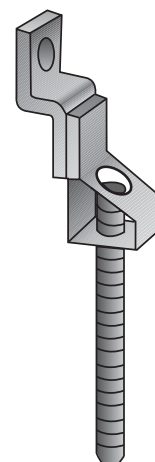


Fig. 2

Recommended for support of up to 2" stationary pipe only.

Catalog #	Fig. #	RS	Finish*	Box/Case Qty.	Load Limit (lbs)
4TIB	1	1/4" - 20	ZP	100/1000	160
4TIO	2	1/4" - 20	ZP	100/1000	160
6TIB	1	3/8" - 16	ZP	100/1000	160
6TIO	2	3/8" - 16	ZP	100/1000	160



Sold by:

TWAcComm.com
http://www.TWAcComm.com
Toll Free: (877) 892-2666

* See page 3 for Finish and Material Descriptions.