

Conduit/Cable

Flexible Conduit And Cable Hanger

Features

- Bundle runs* of MC or AC or communications cables.
- Can be used with all flange clips or deck clip DH2. Also AO or AB, VF14, AF14, 122-123.

*Refer to local authorities and NEC Article 310 for derating ampacity when flexible power cables are used.






Fig. 1

Fig. 2

Applications

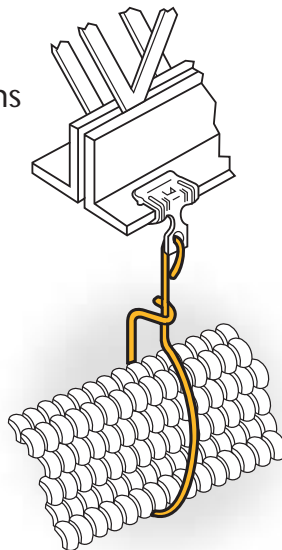

Bridle Rings not recommended for high performance cables, see CableCat series, PAGES 156-159.



Sizing Chart

Ultimate static load limit 75 lbs. - WMX6, 50 lbs. - WMX3

| CATALOG NUMBER | FIG. NO. | NUMBER OF RUNS OF MC/AC CABLE THAT MAY BE SUPPORTED | "A" DIM. | ULTIMATE STATIC LOAD RATING | QTY. PER BOX |
|----------------|----------|---|----------|-----------------------------|--------------|
| WMX3 | 1 | 3 | 1 1/8" | 50# | 100 |
| WMX6 | 2 | 6 | 1 3/4" | 75# | 100 |

Read safety instructions and instruction sheets contained in packages before using or applying fastener.



Conduit/Cable

SBT18 Multiple Conduit Mounting Plate

Features

- Easy "snap-in" attachment of up to three conduit clips
- No tools necessary for installation of clips
- Automatic alignment with standard 1-1/2" electrical box knockouts and mounting holes
- Eliminates conduit bends for 1/2" and 3/4" sizes
- Available in a variety of riveted assemblies




Fig. 1

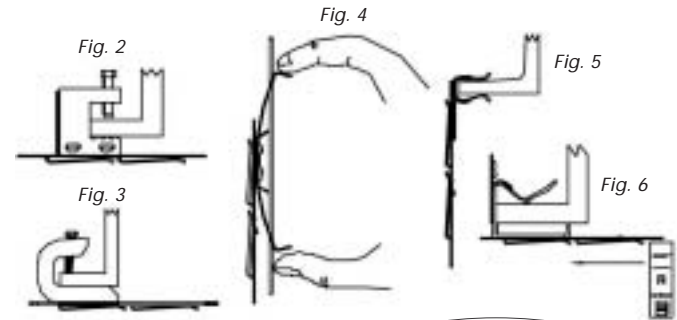


Fig. 2

Fig. 4

Fig. 5

Fig. 3

Fig. 6



| CATALOG NUMBER | FIG. NO. | DESCRIPTION | QTY. PER BOX |
|----------------|----------|---|--------------|
| SBT18 | 1 | Multi-Run, Conduit Hanger Plate | 50 |
| SBT1824SM | 5 | Hammer-on; side mount 1/8"-1/4" flange | 50 |
| SBT1858SM | 5 | Hammer-on; side mount 5/16"-1/2" flange | 50 |
| SBT18912SM | 5 | Hammer-on; side mount 9/16"-3/4" flange | 50 |
| SBT1824 | 6 | Hammer-on; underside 1/8"-1/4" flange | 50 |
| SBT1858 | 6 | Hammer-on; underside 5/16"-1/2" flange | 50 |
| SBT18912 | 6 | Hammer-on; underside 9/16"-3/4" flange | 50 |
| SBT184Z34 | 4 | Multi-function clip #12 wire thru 1/4" plain rod | 50 |
| SBT186Z34 | 4 | Multi-function clip 3/8" plain or threaded rod | 50 |
| S3575BP50 | | 1/4"-20 x 3/8" round head screw | 50 |
| SBT18KIT1 | | Kit for beam applications – side mount or underside (BC200, SBT18, S3575BP50) | 50 |
| SBT18BC | 2 | Beam clamp thru 1/2" flange | 50 |
| SBT18BC200 | 3 | Beam clamp 1/8" to 5/8" flanges | 50 |

Read safety instructions and instruction sheets contained in packages before using or applying fastener.