



Conduit To Conduit

Features

- Requires no tools to install.
- Available for conduit 1/2" to 1" EMT and 1/2" to 3/4" Rigid.
- Ideal as spacer between same or different size conduit.

Applications

Top conduit to be used for support only, not a raceway.



Sizing Chart

CATALOG NUMBER	CONDUIT SIZE*	QTY. PER BOX
8P8P	1/2" to 1/2"	100
8P12P	1/2" to 3/4"	100
8P16P	1/2" to 1"	50
12P12P	3/4" to 3/4"	100
12P16P	3/4" to 1"	100
16P16P	1" to 1"	50

Ultimate static load limit 25 lbs.


*EMT. For Rigid conduit use next larger size clip (1/2" rigid use 12P).

Lightweight Trapeze

Features

- Fast, easy assembly for lightweight loads up to 100 lbs.
- Use with 3/8" MC/AC to 2" conduit.
- No screws or bolts.

Applications

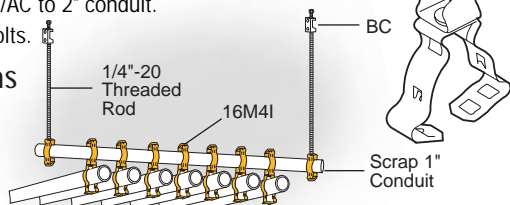

Sizing Chart

CATALOG NUMBER	DESCRIPTION	QTY. PER BOX
166M	14-2 thru 12-3 MC/AC to 1" EMT	100
16812M	1/2" or 3/4" Conduit to 1" EMT	100
1616M	1" Conduit to 1" EMT	100
1620M	1 1/4" Conduit to 1" EMT	50
1624M	1 1/2" Conduit to 1" EMT	50
1632M	2" Conduit to 1" EMT	50

Total load of trapeze must not exceed 100 lbs.



Read safety instructions and instruction sheets contained in packages before using or applying fastener.

One-Piece Strut Clamp


SCH Series

Features

- One-piece installation means no screws or bolts to drop.
- Installs quickly and easily. Requires only a screwdriver or nut driver for installation.
- Heavy-duty construction with a bright zinc finish.
- Size 3/8" MC/AC to 4" EMT conduit.
- All sizes available with load distribution plate attached to screw.

Applications

Patent No. 4,429,440

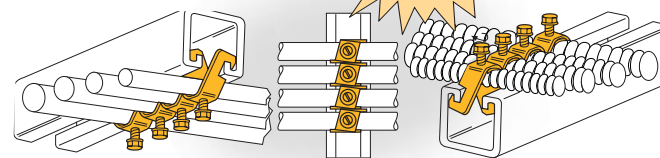

Sizing Chart

CATALOG NUMBER	FIG. NO.	EMT	RIGID	CABLE O.D. RANGE	STATIC LOAD LIMIT	QTY. PER BOX
SCH8	1	1/2"	—	—	200	100
SCH12	1	3/4"	1/2"	—	200	100
SCH16	1	1"	3/4"	—	200	100
SCH20	1	1 1/4"	1"	—	200	100
SCH6B	2	3/8" MC/AC	—	.10" - .63"	200	100
SCH8B	2	1/2"	—	.34" - .71"	200	100
SCH12B	2	3/4"	1/2"	.57" - .92"	200	100
SCH16B	2	1"	3/4"	.72" - 1.16"	200	100
SCH20B	2	1 1/4"	1"	1.00" - 1.51"	200	100
SCH24B	2	1 1/2"	1 1/4"	1.25" - 1.74"	350	50
SCH32B	2	2"	1 1/2"	1.74" - 2.20"	350	50
SCH40B	3	—	2"	2.00" - 2.38"	350	25
SCH48B	3	2 1/2"	2 1/2"	2.38" - 2.88"	350	25
SCH56B	3	3"	3"	2.72" - 3.50"	350	25
SCH64B	3	3 1/2"	3 1/2"	3.25" - 4.00"	350	10
SCH72B	3	4"	4"	3.85" - 4.50"	350	10

Read safety instructions and instruction sheets contained in packages before using or applying fastener.