



## Industrial Grade




**LEVITON**  
Building a Connected World

# PLUS DECORA Receptacles

Back and Side Wired NEMA 5-15R & 5-20R (Basic Cat. No. denotes Mahogany device except where noted)

DESCRIPTION	CAT. NO./COLOR* 15A/125V	CAT. NO./COLOR* 20A/125V
	5-15R 	5-20R 
<b>Hospital Grade, Duplex</b>	16262-HG I, W, G, R (No Mahogany)	16362-HG I, W, G, R
<b>Hospital Grade, Tamper Resistant Duplex</b>	16262-SG I, W, R	—
<b>Hospital Grade, Isolated Ground Duplex (Not Self-Grounding)</b>	16262-IG (Basic Cat. No. Orange) B, I, W, G, R, E	16362-IG (Basic Cat. No. Orange) B, I, W, G, R, E
<b>Hospital Grade, Power Light™ Duplex</b>	16262-PL I, W, R (No Mahogany)	16362-PL I, W, R (No Mahogany)
<b>Industrial Grade, Duplex</b>	16262 I, W, GY, E	16362 I, W, GY, E, A


Back and Side Wired NEMA 6-20R

DESCRIPTION	CAT. NO./COLOR* 20A/250V	
	6-20R 	
<b>Hospital Grade, Duplex</b> I, W (No Mahogany)	16462-HG	

Wallplates for Isolated Ground Devices  
Engraved with "Isolated Ground"

DESCRIPTION	CAT. NO.	COLOR*
<b>Decora Receptacle Wallplate</b>	80401-IG	Orange only

All devices are UL Listed and CSA Certified.

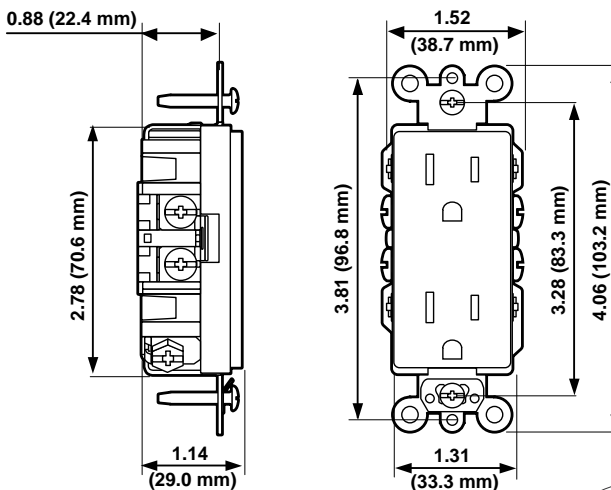

ALL RECEPTACLES ON THIS PAGE  
Cat. No. 16262 Shown

Sold by:



### SPECIFICATIONS & FEATURES

- Durable thermoplastic face in an array of contemporary colors
- Receptacles have a locked-in mounting strap with a self-grounding clip riveted to the strap (Except Isolated Ground devices)
- Hospital Grade Tamper-resistant receptacles include a unique shutter mechanism that opens easily for the insertion of 2 or 3-prong plugs while preventing entry by other small objects into either outlet slot
- Hospital Grade Isolated Ground receptacles (identified by an orange face or triangle on the face) protect sensitive electronic equipment and eliminate electromagnetic interference by providing a separate path to ground
- Power Light meets UL 498 Hospital Grade identification requirements and provides visual confirmation that the device is energized.
- Back and side wiring terminals permit fast installation of up to # 10 solid or stranded conductors
- Triple-wipe copper alloy contacts ensure maximum conductivity

### TESTING & CODE COMPLIANCE

- UL Listed (File #E-13399)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

### \*COLOR

Basic Cat. Nos. denote Mahogany device (unless indicated) and Orange for Isolated Ground (-IG) Devices. Isolated Ground Receptacle is distinguished by an orange triangle on its face. For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Mahogany (for IG devices only, add -B), Red (-R), Gray (-G or -GY) and Black (-E).

### MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 60°C  
Maximum Continuous

For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.