




SIMPLIFIED TWO-WIRE MULTI-UNIT DOOR PHONE

DA-2DG/DA-4DG

DA-1MD



Two-Wire Door Phone
& Electric Strike for
up to 4 Tenants

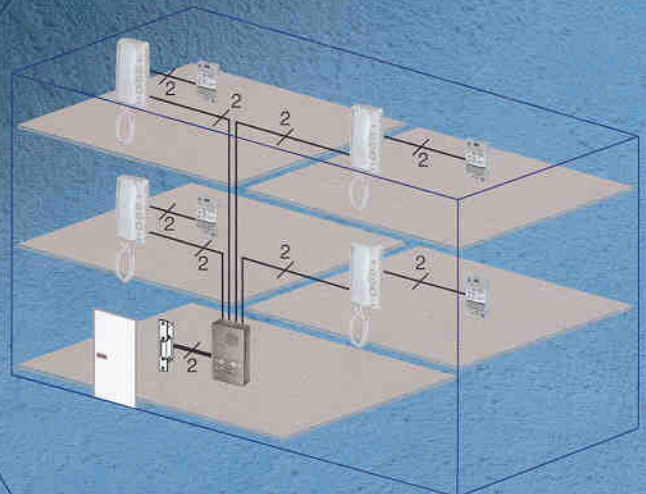

Sold by:



DA Door Phone to Accommodate up to Four Tenants



Electric door strike
Door release, being fed power from door station, can be activated by master station DOOR RELEASE button operation.

Option

EL-9S or equivalent

Directory backlighting



Door station

- Vandal resistant construction
- Thin and compactly designed unit
- Directory is steadily backlit
- Choice of two color panels, silver or gray

DA-4DG



DA-1MD



DA-1MD



PT-1211C



Power supply

PT-1211C



Power supply

Master station

Master station

DA-1MD



PT-1211C



Power supply

Master station

PT-1211C




Power supply

Master station

- Door station calls in with audio tone, adjustable. Can be muted with LED indicator
- Door release button to unlock door

Option


Gate, Light, Garage Door, etc.



Relay/ controller (Less than AC18V, 40mA)


Option plan

Power supply Homerun Wiring

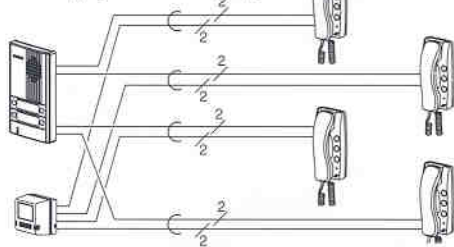


Names & Dimensions


• Master station

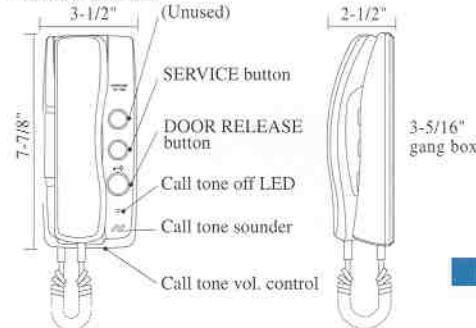

• Door station

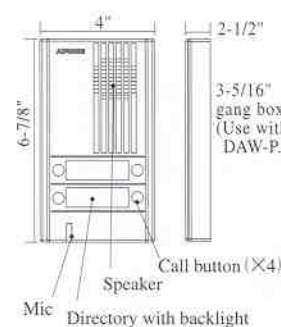

• Power supply

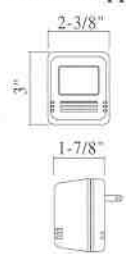

System features

- Connect Electric Door Strike with same two wires from Door station. Requires no extra power supply for electric door strike.
- Existing doorbell or chime wires can be utilized (Disconnect from transformer)
- Master station is equipped with DOOR RELEASE and one FUNCTION button to turn on entrance light, etc.
- Optional call extension sounder

Specifications

- Power source: AC 15V, supplied from Power supply
- Calling: Electronic tone (while the button is depressed) w/adj. volume or muted
- Communication: Simultaneous with handset
- Talk path: Single talk channel, with no break-in
- Weight: DA-1MD: approx. 0.82lbs. DA-4DG: approx. 0.60lbs. PT-1211C: 0.88lbs.
- Wiring: 2 wires, polarized from door to ea. DA-1MD
- Wiring distance:

(1)Door strike (2)Door station (3)Master station (4)Power supply

	AWG22	AWG20	AWG18
(1)-(2)-(3)-(4)	360'	660'	1,020'
(3)-(4)	180'	330'	510'

• PT-1211C power supply is designed for exclusive use of DA-1MD.

DA-2DS



DA-2DG



DA-4DS

Options



DAR-1 Call extension sounder



EL-9S Door strike or others: rated AC16V, 20Ω or more



Gate, Light, Garage Door, or other devices can be controlled, using relay/controller.

Distributed by:



AIPHONE
Providing Peace of Mind

<http://www.aiphone.com/>

Printed in Japan