




SIMPLIFIED TWO-WIRE MULTI-UNIT DOOR PHONE

**DA-2DG/DA-4DG**

**DA-1MD**



Two-Wire Door Phone  
& Electric Strike for  
up to 4 Tenants

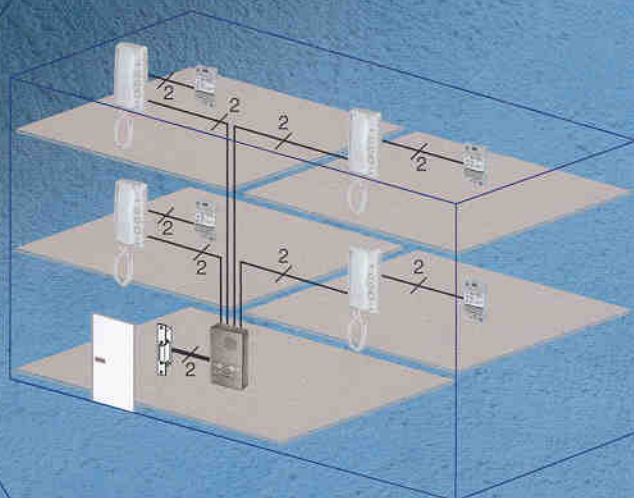

# DA Door Phone to Accommodate up to Four Tenants

**Electric door strike**  
Door release, being fed power from door station, can be activated by master station DOOR RELEASE button operation.

Option  
EL-9S or equivalent

Directory backlighting



## Door station

- Vandal resistant construction
- Thin and compactly designed unit
- Directory is steadily backlit
- Choice of two color panels, silver or gray

DA-4DG



DA-1MD



PT-1211C



Power supply

Master station

DA-1MD



PT-1211C



Power supply

Master station

DA-1MD



PT-1211C



Power supply

Master station

DA-1MD



PT-1211C




Power supply

Master station

Option  
Gate, Light, Garage Door, etc.  
AC  
Relay/ controller  
(Less than AC18V, 40mA)


## Option plan

Power supply Homerun Wiring

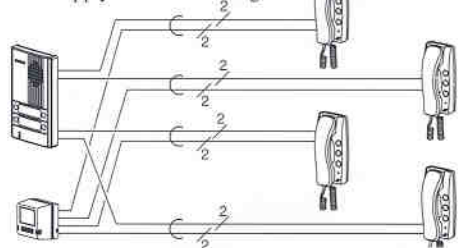


## Names & Dimensions


### Master station

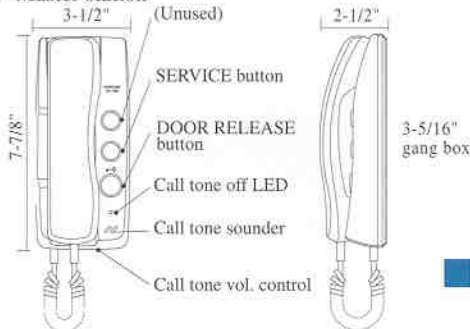

### Door station



### Power supply



## System features

- Connect Electric Door Strike with same two wires from Door station. Requires no extra power supply for electric door strike.
- Existing doorbell or chime wires can be utilized (Disconnect from transformer)
- Master station is equipped with DOOR RELEASE and one FUNCTION button to turn on entrance light, etc.
- Optional call extension sounder

## Specifications

- Power source: AC 15V, supplied from Power supply
- Calling: Electronic tone (while the button is depressed) w/adj. volume or muted
- Communication: Simultaneous with handset
- Talk path: Single talk channel, with no break-in
- Weight: DA-1MD: approx. 0.82lbs. DA-4DG: approx. 0.60lbs. PT-1211C: 0.88lbs.
- Wiring: 2 wires, polarized from door to ea. DA-1MD
- Wiring distance:

(1)Door strike (2)Door station (3)Master station (4)Power supply

	AWG22	AWG20	AWG18
(1)-(2)-(3)-(4)	360'	660'	1,020'
(3)-(4)	180'	330'	510'

• PT-1211C power supply is designed for exclusive use of DA-1MD.

DA-2DS DA-2DG



DA-4DS



## Options



DAR-1  
Call extension  
sounder



EL-9S  
Door strike  
or others:  
rated AC16V,  
20Ω or more



Gate, Light, Garage Door,  
or other devices can be  
controlled, using relay/  
controller.

Distributed by:

Sold by:



http://www.TWAcomm.com  
Toll Free: (877) 892-2666

**AIPHONE®**  
Providing Peace of Mind

http://www.aiphone.com/  
Printed in Japan