





Back and Side Wired, Self-Grounding*





NEMA 5-15R, 6-15R, 5-20R & 6-20R (Basic Cat. No. Denotes Mahogany Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R 	6-15R 	5-20R 	6-20R 
Duplex	16252 I, W, GY, E, A	16662 I, W	16352 I, W, GY, E, A	16462 I, W, E
Single★	16251 I, W	16651 I, W (No Mahogany)	16351 I, W	16451 I, W (No Mahogany)

*Self-grounding when installed in a properly grounded metal wallbox

Side Wired, Self-Grounding* NEMA 5-15R, 6-15R, 5-20R & 6-20R

(Basic Cat. No. Denotes Mahogany Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R 	6-15R 	5-20R 	6-20R 
Duplex	16242 I, W, E (No Mahogany)	—	16342 I, W, GY, E	—
Single★	16241 I, W (No Mahogany)	16641 I, W (No Mahogany)	16341 I, W, GY, A	16441 I, W, A (No Mahogany)


*Self-grounding when installed in a properly grounded metal wallbox

Back and Side Wired, Self-Grounding*

125V/250V Dual Voltage NEMA 5-15R & 6-15R

DESCRIPTION	15AMP	COLOR*
Duplex, Dual Voltage	16292	I, W

*Self-grounding when installed in a properly grounded metal wallbox
All devices are UL Listed. Also CSA Certified except where indicated by★

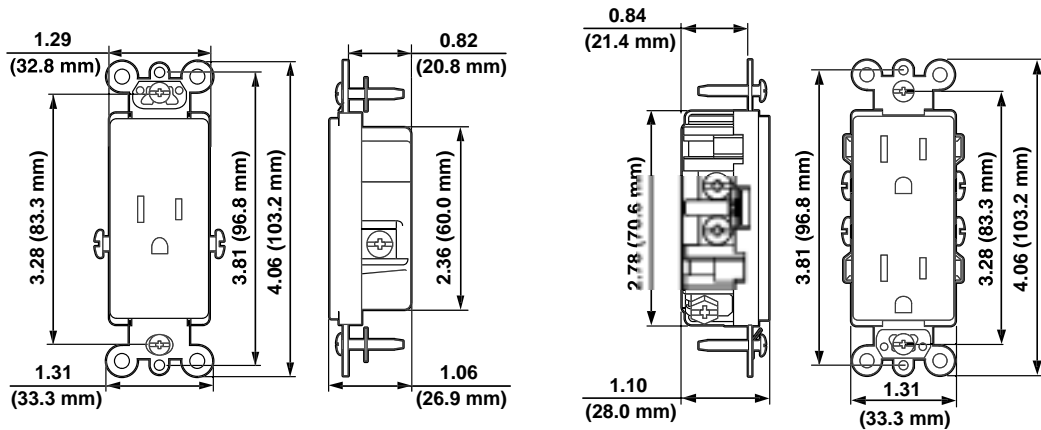

SPECIFICATIONS & FEATURES

- Back Wire and Side Wire terminal options
- Heavy-gauge zinc-plated steel locked-in wrap-around strap
- Terminal screws accept up to No. 10 copper or copper-clad wire, solid or stranded
- Back wire terminals accept up to No. 10 copper or copper-clad wire, solid or stranded
- Labor-saving self-grounding clip
- Heavy-duty triple-wipe brass contacts for long service life
- Impact-resistant thermoplastic construction

TESTING & CODE COMPLIANCE

- UL Listed (File #E-13399)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

*COLOR

Basic Cat. No. denotes Mahogany device (unless indicated). For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY) and Black (-E).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating

Operating Temperature: -40°C to 60°C
Maximum Continuous

For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.

