

Residential Grade



Decora AC Receptacles


Side Wire and Quickwire NEMA 5-15R

DESCRIPTION

15 AMP

COLOR

Basic Cat. No. Denotes Mahogany



DESCRIPTION	15 AMP	COLOR
Duplex	5325	I, W, A, GY, E
Duplex, Self-Grounding Clip	5325-St†	I, W, A (No Mahogany)
Duplex, 8-Hole Quickwire	5328	I, W, A (No Mahogany)

†Self-grounding when installed in a properly grounded metal wallbox
All devices are UL Listed and CSA Certified.



5325-W in 80301-W



5325-GY in 80301-GY



SPECIFICATIONS & FEATURES

- Side Wire and Quickwire™ holes accept No. 14 AWG copper wire for Cat. No. 5325
- Heavy-gauge zinc-plated steel mounting strap
- Heavy duty double-wipe brass contacts for long service life

TESTING & CODE COMPLIANCE


- UL Listed (File #E-13399)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited One-Year Warranty

*COLOR

Basic Cat. No. denotes Mahogany (Brown) device unless indicated. For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY), and Black (-E).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
 Operating Temperature: -40°C to 60° C
 Maximum Continuous

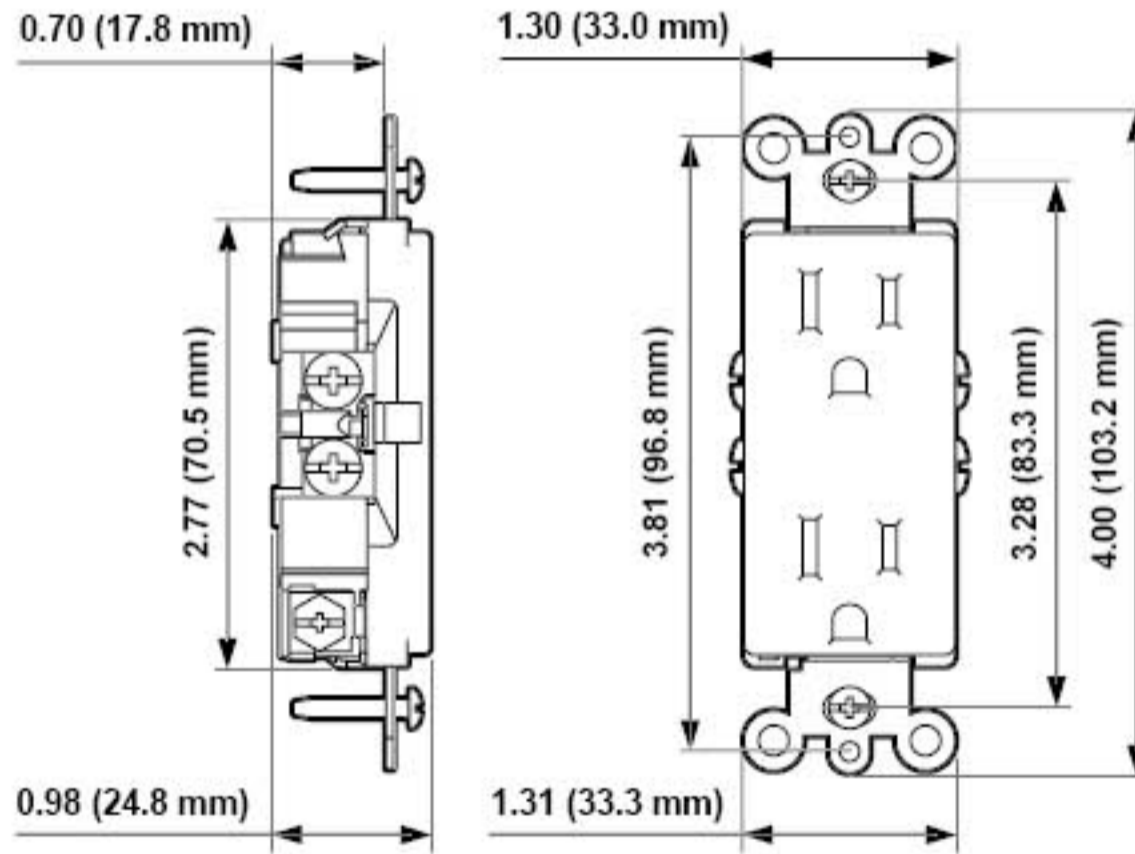

DUPLEX QUICKWIRE PUSH-IN AND SIDE-WIRED
 Cat. No. 5325

For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.