

GFCI Personnel Protection Devices

Hospital Grade SmartLock™ GFCI Receptacles — Back and Side Wired

15 AMP 125V at Receptacle, 20 AMP Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> | NEMA CONFIG. |
|----------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------|--------------|
| Duplex with LED Indicator Light, buttons match face color | 8598-HG | I, W, G, R, A | 5-15R |
| Duplex with LED Indicator Light, buttons match face color. DIN-Rail mounting with terminal wiring block. UL Recognized Component | 8598-DIN | Black Only | |

20 AMP 125V at Receptacle and Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> | NEMA CONFIG. |
|-----------------------------------------------------------|----------|-------------------------------------------------------|--------------|
| Duplex with LED Indicator Light, buttons match face color | 8898-HG | I, W, G, R, A | 5-20R |




Commercial Grade SmartLock™ GFCI Receptacles — Back and Side Wired

15 AMP 125V at Receptacle, 20 AMP Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> | NEMA CONFIG. |
|-----------------------------------------------------------------------|----------|-------------------------------------------------------|--------------|
| Duplex, No Indicator Light, buttons match face color | 8599 | I, W, GY, E, A | 5-15R |
| Duplex, No Indicator Light, Black & Red buttons. Contractor Pack | 8599-CP | I, W (No Brown) | |
| Duplex, No Indicator Light, Black & Red buttons. With 4 1/2" leads | 8599-L | I, W (No Brown) | |
| Duplex with LED Indicator Light, buttons match face color | 8598 | I, W, A | |
| Duplex with LED Indicator Light, Black & Red buttons. Contractor Pack | 8598-CPW | White Only | |

20 AMP 125V at Receptacle and Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> | NEMA CONFIG. |
|-----------------------------------------------------------|----------|-------------------------------------------------------|--------------|
| Duplex, No Indicator Light, buttons match face color | 8899 | I, W, GY, E, A | 5-20R |
| Duplex with LED Indicator Light, buttons match face color | 8898 | I, W, A | |




SmartLock GFCI RECEPTACLE
Cat No. 8599

Combination Switch/SmartLock™ GFCI Outlet — Side Wired

8.3 AMP 1000 WATT @ 120V AC Switch Rating,
15 AMP 125V at Receptacle, 20 AMP Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> | NEMA CONFIG. |
|-----------------------------------------------------------------------------|----------|-------------------------------------------------------|--------------|
| Single-Pole Switch and SmartLock GFCI-Protected Outlet, Black & Red buttons | 8299 | I, W, A | 5-15R |

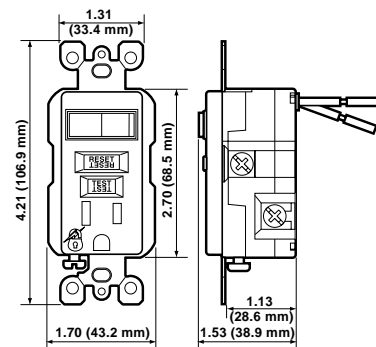

COMBINATION SWITCH/
SmartLock GFCI OUTLET
Cat No. 8299

Switch-Rated GFCI — Back and Side Wired

1.5 HP @ 120V AC Switch Rating, 20 AMP 125V Feed-Through

| DESCRIPTION | CAT. NO. | COLOR* <small>Basic Cat. No. Denotes Brown</small> |
|----------------------------------------------------------|----------|-------------------------------------------------------|
| Blank Face, No Indicator Light, buttons match face color | 8590 | I, W, A |

All devices are UL Listed and CSA Certified.



For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.