

Decora® Combination Devices

15 AMP

DESCRIPTION	RATING	CAT. NO.	COLOR*
Single-Pole Switch/Receptacle	Switch: 15A-120V AC Receptacle: 15A-125V	5625	I, W, A, GY
Single-Pole Switch/Pilot Light	Switch: 15A-120V AC Pilot: 1/25W-125V AC	5626	I, W, A
Two Single-Pole Switches	15A-120/277V AC	5634	I, W, A, GY
3-Way Switch/Single-Pole Switch	15A-120/277V AC	5641	I, W, A
Two 3-Way Switches	15A-120/277V AC	5643	I, W, A
3-Way Switch/Receptacle	Switch: 15A-120V AC Receptacle: 15A-125V	5645	I, W, A
3-Way Switch/Pilot Light	Switch: 15A-120V AC Pilot: 1/25W-125V	5646	I, W, A



5625-W in 80301-W

20 AMP

DESCRIPTION	RATING	CAT. NO.	COLOR*
Two Single-Pole Switches	20A-120/277V AC	5627	I, W, A
Single-Pole Switch/Receptacle	Switch: 20A-120V AC Receptacle: 20A-125V	5636	I, W, A
Single-Pole Switch/Pilot Light	Switch: 20A-120V AC Pilot: 1/25W-125V AC	5637	I, W, A
Two 3-Way Switches	20A-120/277V AC	5640	I, W, A



5627-A in 80301-A

All devices are UL Listed and CSA Certified.

SPECIFICATIONS & FEATURES

- Elegant Decora styling provides multiple control in a single-gang wallbox
- All devices have grounding screw
- Fit standard wall boxes

TESTING & CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

*COLOR


Colors available as listed. For other color selections, add suffix to catalog numbers as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY).

HORSE POWER

15A Switch	20A Switch
1/2 @ 120V	1 @ 120V
2 @ 240V	2 @ 240V

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: -40°C to 120°C

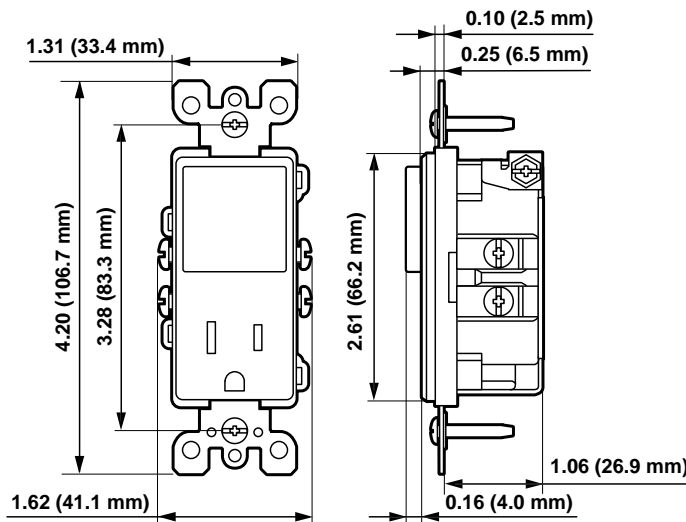

SWITCH/RECEPTACLE
CAT. NO. 5625



For more information regarding matching wallplates, colors, materials, single and multi-gang, refer to Wallplates, section G.