

BA-1, BA-1P

Paging Adaptors for Aiphone Intercom Systems

DESCRIPTION:

The BA-1 and BA-1P paging adaptors allow access to a standard paging system from an intercom master station. The BA-1 is designed for use with Aiphone's LAF/LDF-C, LEF, LEM and NEM systems. The BA-1P is designed to work with the AP-M and MP-S systems. One or more paging zones can be added to any of the systems mentioned above, and each zone occupies a channel on the master station.

Each paging zone requires the appropriate adaptor, a suitable amplifier, and speakers. Outgoing paging only -- no talkback is available.

FEATURES:

- Access paging system from the intercom
- Zone paging with multiple adaptors
- Eliminates need for separate paging microphone where there is an intercom master
- Separate transmit volume control
- Compact, easy to install
- Schools: Page hallways, playground areas, gymnasiums, and cafeteria
- Commercial areas: Page waiting areas, office areas, hallways, or outside areas

BA-1
or
BA-1P

**SOME APPLICATIONS:**


- Schools
- Offices
- Restaurants
- Retail Stores
- Prisons and Jails
- Healthcare Facilities
- Commercial Buildings
- Factories / Warehouses

SPECIFICATIONS:

Power Source:	Supplied by Master Station
Input:	BA-1: 20 Ω BA-1P: 8 Ω
Output:	10K Ω
Amplifier Input:	AUX input (10K Ω), or 100mV for rated output
Activation:	Paging is activated by selecting the assigned station button on the master. Each BA-1 or BA-1P occupies one channel on the master station.
Wiring:	2 conductors from master. Use Aiphone #822202.
Wiring Distance:	Same requirement as a sub station for the specified system.
Wire Termination:	Color-coded wires (Input: Yel/Grn, Output: Brn/Org.)
Mounting:	Surface mount with mounting hardware
Dimensions (HxWxD):	4-1/16" x 2-7/16" x 1-3/8"


BA-1/BA-1P Paging Adaptors

LEF SYSTEM LAYOUT EXAMPLE:

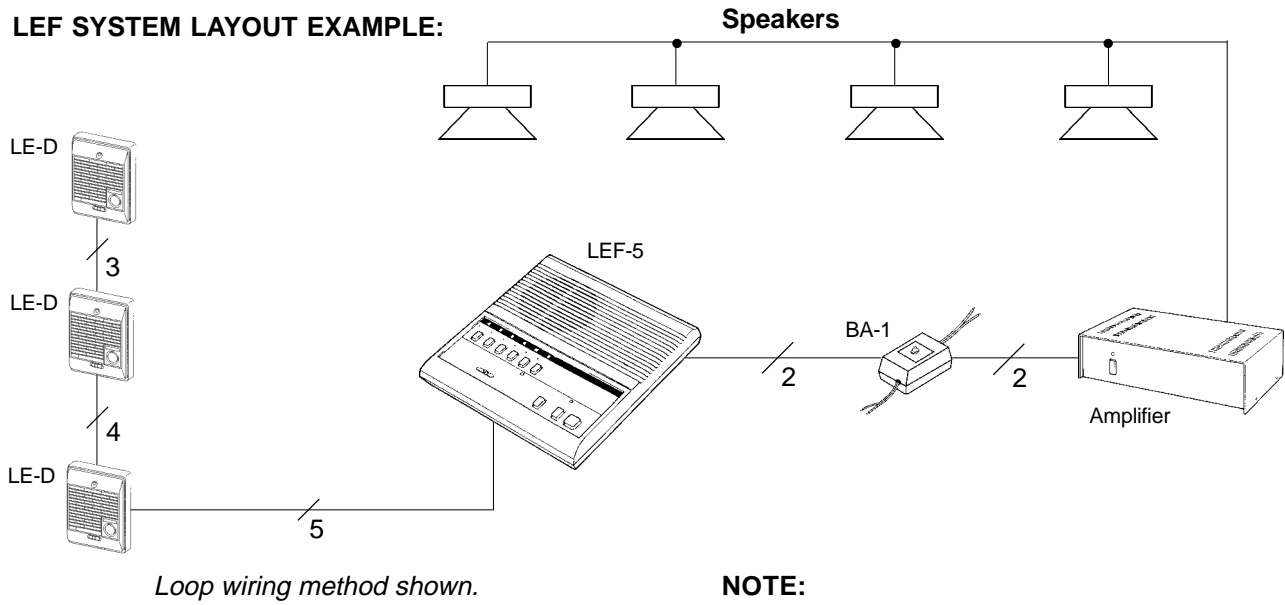

NOTE:
For multiple zones of paging, include a BA-1 and amplifier for each zone. Each adaptor occupies a channel on the master station.

AP-M SYSTEM LAYOUT EXAMPLE:

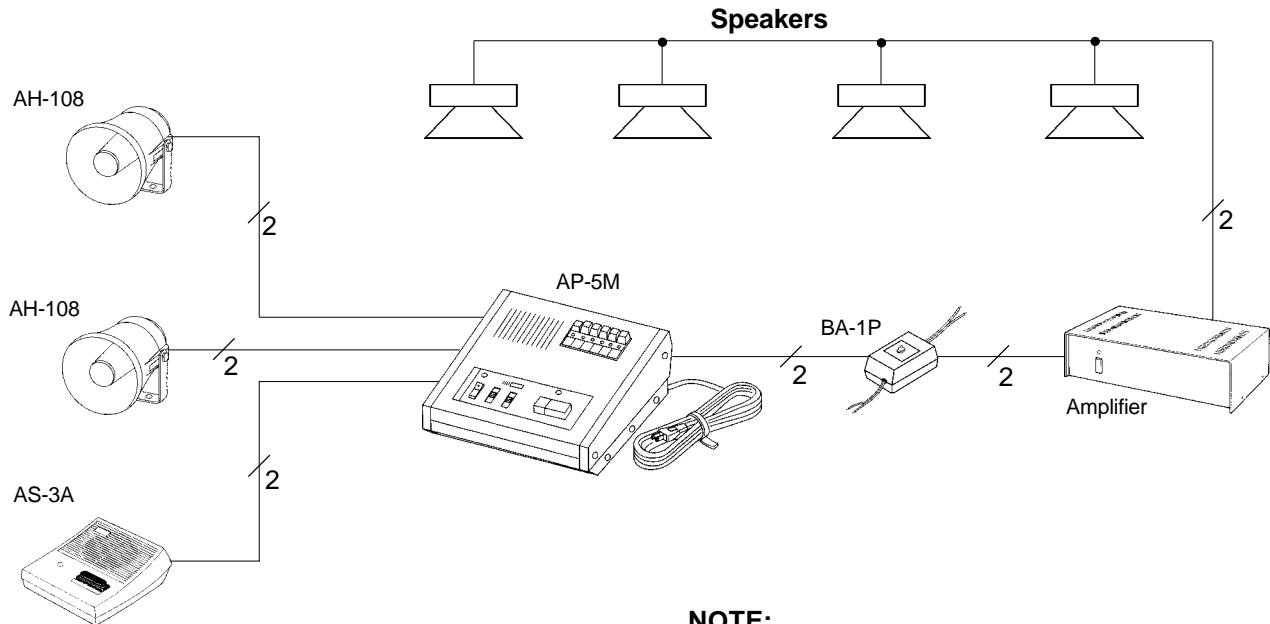

NOTE:
For multiple zones of paging, include a BA-1P and amplifier for each zone. Each adaptor occupies a channel on the master station.

Sold by:

