



Straight Blade Receptacles

Side Wired 15 AMP 125 and 250V
20 AMP 125 and 250V (Basic Cat. No. Denotes Brown Device*)

| DESCRIPTION | CAT. NO./COLOR 15A/125V | CAT. NO./COLOR 15A/250V | CAT. NO./COLOR 20A/125V | CAT. NO./COLOR 20A/250V |
|--|----------------------------|----------------------------|----------------------------|----------------------------|
| | 5-15R | 6-15R | 5-20R | 6-20R |
| Duplex Receptacle | CR15 I, W, GY, E, A | 5028* I | CR20 I, W, GY, E, A | 5822* I, W |
| Duplex Receptacle | CR15-C* | — | — | — |
| Duplex Receptacle, Smooth Face | CRO15 I, W, GY | — | CRO20 I, W, GY | — |
| Single Display Receptacle, Brass Plate, Brass Finish | 5250 Brass | — | — | — |
| Duplex Receptacle, on 4" Cover★ | 5042 Zinc plated steel | — | — | — |
| Single Receptacle | 5015 I, W, A | 5029 I | 5801 I, W, A | 5821 I, W, A |
| Single Receptacle on 4" Cover | 5059 Zinc plated steel | — | — | — |
| Duplex Receptacle with Pigtail Leads★ | 5040 I, (No Brown) | — | 5340 I | — |
| Floorbox assembly w/Solid Brass Floorplate | 5249-FBA Brass | — | 5349-FBA Brass | — |
| Floorbox Plug | 5249-CAP Brass | — | — | — |
| Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 3/4" Centers | 5258-SS E Only | 5658-SS E Only | — | 5458-SS E Only |
| Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 15/16" Centers | 5284-SS E Only | — | — | — |
| Duplex Receptacle, Less Plaster Ears | — | — | 5800-4 I | — |
| Tamper Resistant Duplex Receptacle | CR15S-G I, W (No Brown) | — | — | — |

*Canadian version
All devices are UL Listed. Also CSA Certified except where indicated by★



SPECIFICATIONS & FEATURES


- Large-head terminal screws, backed out and staked, accept No. 10 copper or copper-clad wire
- All power contacts are triple wipe for maximum conductivity and plug retention — except CR series
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation where applicable
- 5249-FBA, 5349-FBA & 5250
- Complies with NEC 370-27(b)
- All-in-one, ready-to-wire unit provides quick, easy installation
- Plate gasket and O-ring combine to seal out moisture and contaminants (5249-FBA)
- Thick brass plate and screw cap resist abuse and prevent contaminant from entering device
- Durable nylon face and body resist breakage
- Brass screw cap threaded to fit flush to plate
- Green grounding screw

TESTING & CODE COMPLIANCE

- UL Listed 498 (File #E-13399)
- CSA Certified where applicable (File #LR-406)
- NOM Certified (#057)
- Meets or exceeds NEMA WD-1, and -6, and ANSI standards
- Backed by a Limited 10-Year Warranty
- 5249-FBA & 5250
- Meets UL #498 requirements
- CSA Certified (#42)

*COLOR

Basic Cat. Nos. shown above denote Brown color device. For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY) and Black (-E).

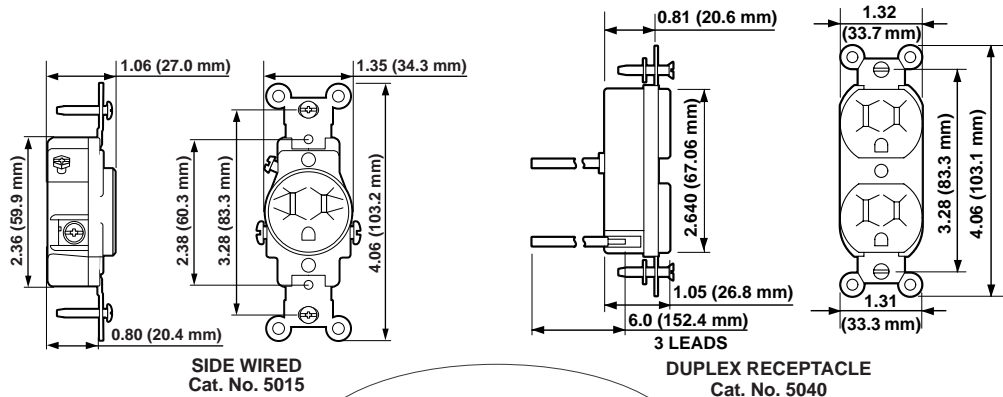

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
Operating Temperature: From -40° C (without impact) to 60°C maximum continuous

