



# Straight Blade Receptacles

Side Wired 15 AMP 125 and 250V  
20 AMP 125 and 250V (Basic Cat. No. Denotes Brown Device\*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R	6-15R	5-20R	6-20R
Duplex Receptacle	CR15 I, W, GY, E, A	5028* I	CR20 I, W, GY, E, A	5822* I, W
Duplex Receptacle	CR15-C*	—	—	—
Duplex Receptacle, Smooth Face	CRO15 I, W, GY	—	CRO20 I, W, GY	—
Single Display Receptacle, Brass Plate, Brass Finish	5250 Brass	—	—	—
Duplex Receptacle, on 4" Cover★	5042 Zinc plated steel	—	—	—
Single Receptacle	5015 I, W, A	5029 I	5801 I, W, A	5821 I, W, A
Single Receptacle on 4" Cover	5059 Zinc plated steel	—	—	—
Duplex Receptacle with Pigtail Leads★	5040 I, (No Brown)	—	5340 I	—
Floorbox assembly w/Solid Brass Floorplate	5249-FBA Brass	—	5349-FBA Brass	—
Floorbox Plug	5249-CAP Brass	—	—	—
Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 3/4" Centers	5258-SS E Only	5658-SS E Only	—	5458-SS E Only
Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 15/16" Centers	5284-SS E Only	—	—	—
Duplex Receptacle, Less Plaster Ears	—	—	5800-4 I	—
Tamper Resistant Duplex Receptacle	CR15S-G I, W (No Brown)	—	—	—

\*Canadian version

All devices are UL Listed. Also CSA Certified except where indicated by★

## SPECIFICATIONS & FEATURES


- Large-head terminal screws, backed out and staked, accept No. 10 copper or copper-clad wire
- All power contacts are triple wipe for maximum conductivity and plug retention — except CR series
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation where applicable
- 5249-FBA, 5349-FBA & 5250
  - Complies with NEC 370-27(b)
  - All-in-one, ready-to-wire unit provides quick, easy installation
  - Plate gasket and O-ring combine to seal out moisture and contaminants (5249-FBA)
  - Thick brass plate and screw cap resist abuse and prevent contaminant from entering device
  - Durable nylon face and body resist breakage
  - Brass screw cap threaded to fit flush to plate
  - Green grounding screw

## TESTING & CODE COMPLIANCE


- UL Listed 498 (File #E-13399)
- CSA Certified where applicable (File #LR-406)
- NOM Certified (#057)
- Meets or exceeds NEMA WD-1, and -6, and ANSI standards
- Backed by a Limited 10-Year Warranty
- 5249-FBA & 5250
  - Meets UL #498 requirements
  - CSA Certified (#42)

## \*COLOR

Basic Cat. Nos. shown above denote Brown color device. For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY) and Black (-E).

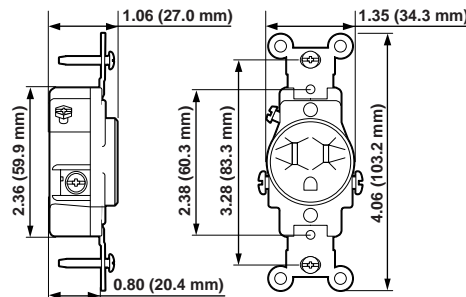

SIDE WIRED  
Cat. No. 5015

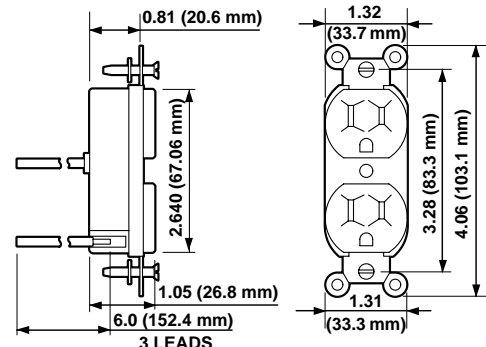

DUPLEX RECEPTACLE  
Cat. No. 5040

## MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: From -40° C (without impact) to 60°C maximum continuous

