























Automatic Reset GFCI Cord Sets and Extension Cord — Black Body

DESCRIPTION	CAT. NO.	LENGTH	NEMA CONFIG.
15A-125V GFCI Cord Set	66591-2C	2 feet	
15A-125V GFCI Cord Set	66591-6C	6 feet	
15A-125V GFCI Cord Set	66591-25C	25 feet	5-15P  5-15R 
15A-125V GFCI Cord Set, with Fluorescent Light	66591-WL	20 feet	
15A-125V GFCI Cord Set, Triple Outlet	66593-3	3 feet	
15A-125V Locking GFCI Cord Set	66597-3	3 feet	L5-15P  L5-15R 
20A-125V GFCI Cord Set	66891-3	3 feet	5-20P  5-20R 
20A-125V Locking GFCI Cord Set	66897-3	3 feet	L5-20P  L5-20R 
15A-125V GFCI Extension Cord*	26591-37C	37 feet	5-15P  No Connector
15A-240V GFCI Extension Cord*	26592-E	35 feet	6-15P  No Connector
20A-125V GFCI Extension Cord*	36591-37C	37 feet	5-20P  No Connector
20A-240V GFCI Extension Cord*	36592-E	35 feet	6-20P  No Connector



Manual Reset GFCI Cord Sets — High Visibility Yellow Body

DESCRIPTION	CAT. NO.	LENGTH	NEMA CONFIG.
15A-125V	69591-3	3 feet	
15A-125V	69591-25	25 feet	5-15P  5-15R 
Triple-tap, 15A-125V	69593-3	3 feet	
20A-125V	69891-3	3 feet	5-20P  5-20R 
15A-125V, w/Wetguard™ Plugs and Connectors	69591-W3	3 feet	5-15P  5-15R 
15A-125V, w/Wetguard™ Plugs and Connectors	69591-W25	25 feet	5-15P  5-15R 
20A-125V, w/Wetguard™ Plugs and Connectors★	69891-W3	3 feet	5-20P  5-20R 

*UL recognized component
 All devices are UL Listed. Also CSA Certified except where indicated by★

SPECIFICATIONS & FEATURES


- UL 943 Class A GFCI operation with open-neutral protection
- Automatic Reset Cord Sets (black body) will automatically reset ON when power is restored after a power interruption
- Manual Reset Cord Sets (yellow body) will not automatically reset ON when power is restored after a power interruption—Reset button must be pushed in
- Trip threshold meets or exceeds UL requirements for tripping time
- Impact-resistant thermoplastic cover and body.
- Silver alloy contacts
- Water-resistant enclosure is sealed by ultrasonic welding
- Power indicator light goes off if GFCI trips or unit is unplugged

TESTING & CODE COMPLIANCE


- UL Standard 943 Class A (GFCI)
- UL Listed (File #48380)
- Backed by a Limited One-Year Warranty

MATERIAL CHARACTERISTICS

Flammability: Rated V2
 Operating Temperature: -30°F (-35°C) to 151°F (66°C)

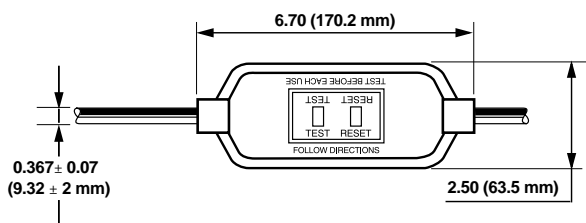

15A AUTO GFCI CORD
 Cat. No. 66591-2C

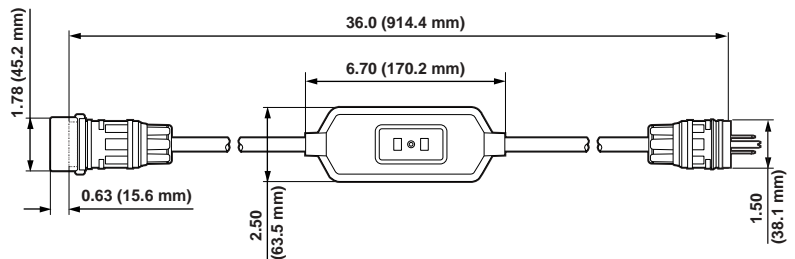

WETGUARD™ MANUAL RESET GFCI CORD
 Cat. No. 69591-W3