

eXtreme® 6+ Connector

APPLICATION

Leviton's eXtreme® 6+ Connector is designed to be used with all Leviton QuickPort® compatible products. The connectors include Leviton's patented "Retention Force Technology" (RFT) which promotes consistent performance over the life of the system. Includes unique pair separation towers allowing for quicker and easier terminations. The connector features a 180° configuration such that the punch field is in the back, allowing for rear termination. Leviton's eXtreme 6+ System is designed for use in high megabit applications such as Gigabit Ethernet.

FEATURES

- Includes "Retention Force Technology."
- Universal T568A and T568B wiring labels for 110-style IDC terminations.
- Available in 13 different TIA/EIA 606-A compatible colors.
- 180° configuration allowing for rear termination.
- Unique pair separation towers designed to minimize untwisting and to speed installation.

STANDARDS COMPLIANCE

eXtreme 6+ System components meet or exceed the Category 6/Class E requirements for channel/component level performance per TIA/EIA-568-B.2-1 and ISO/IEC 11801-B. Components certified per cULus and ACA requirements.

PHYSICAL SPECIFICATIONS

Materials: Connector body is high-impact, fire-retardant plastic rated UL 94V-0. Spring wire contacts are high quality copper-based alloy, plated with 50 micro-inches of gold over 100 micro-inches of nickel for lowest electrical contact resistance and maximum life.

Dimensions: .885"H x .635"W x 1.211"D

DESIGN CONSIDERATIONS

- Use in any QuickPort housing to support eXtreme 6+ UTP connectivity in surface mount, flush mount, or modular furniture outlets and field configurable panels.
- Can be used in conjunction with other QuickPort snap-in modules for voice/data and video applications over UTP, coax and fiber.
- To identify ports: use different colored modules for each application (full selection of TIA/EIA-606 compatible colors-13 available).

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to www.levitonvoicedata.com/warranty.

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

The connector shall meet or exceed the requirements for Category 6 described in TIA/EIA 568-B.2-1 as well as the Class E requirements described in ISO/IEC 11801-B. The connector shall feature Retention Force Technology and 180° configuration such that the punch field is in the back, allowing for rear termination. Rear termination field shall include pointed pair separation towers to promote easier installation. All plastics used in construction of the connector bodies shall be fire-retardant with a UL flammability rating of 94V-0. Termination of all connectors shall be 110-type insulation displacement connectors (IDC). The connector shall provide a cutting ledge directly adjacent to the 110-style IDCs against which the wires can be directly terminated and cut in one action. Connector wiring shall be universal and accommodate both T568A and T58B wiring schemes.

eXtreme® 6+ Connector



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.

2222 - 222nd St. SE • Bothell, WA 98021 USA

Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available




eXtreme[®] 6+ Connector


Part Number
61110-R*6

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)



Front View

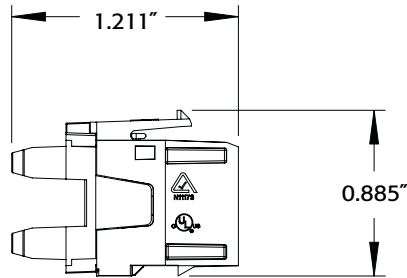

Side View

Part Number

Description	Part No.
eXtreme 6+ Connector	61110-R*6

*= Color choices for connectors: (I) ivory, (W) white, (G) grey, (E) black, (O) orange, (L) blue, (C) crimson red, (Y) yellow, (V) green, (P) purple, (A) almond, (B) brown, (R) dark red.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 - 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available