

## Industrial Grade

# Straight Blade Plugs and Connectors

**LEVITON**  
Building a Connected World

Sold by:



## 20 AMP 125V 2-Pole, 3-Wire Grounding

*Hospital Grade*

DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
	NEMA 5-20P	NEMA 5-20R  CSA config. in Canada
Hospital Grade, Black Body	8315-C	8319-C
Hospital Grade, Transparent Body	8315-CT	8319-CT
Hospital Grade, Lighted Transparent	8315-PLC	8319-PLC
Hospital Grade Angle, Transparent Body	8315-CAT	—

*Industrial Grade*

Black Nylon Body	5366-C	5369-C
Black Nylon Body, Lighted	5366-PLC	5369-PLC
All-Black Nylon, Lighted	5366-PLB	5369-PLB
High-Visibility Yellow Nylon Body	5366-CY	5369-CY
Gray Nylon Body	5366-CG	5369-CG
Angle, Black Nylon Body	5366-CA	5369-CA
Flanged Inlet, White Nylon Body	15378-C	—
Flanged Outlet, White Nylon Body	—	15379-C

## 20 AMP 250V 2-Pole, 3-Wire Grounding

*Hospital Grade*


DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
	NEMA 6-20P	NEMA 6-20R  CSA config. in Canada
Hospital Grade Angle, Transparent Body	8415-CAT	—
<i>Industrial Grade</i>		
Black Nylon Body	5466-C	5469-C
High-Visibility Yellow Nylon Body	5466-CY	5469-CY
Flanged Inlet, White Nylon Body	5478-C	—
Flanged Outlet, White Nylon Body	—	5479-C

*Weather-Resistant Boots*


Our outstanding Industrial Grade boots feature a triple-seal design to protect straight blade and locking plugs and connectors against the harmful effects of dirt and moisture in harsh environments. Boots are available in black or high-visibility yellow. The fluted surface and grip-ring design provide a non-slip grip even in wet conditions.

DESCRIPTION	CAT. NO.
Weather-Resistant Straight Blade Plug Boot, Black Rubber. For 15A & 20A Straight Blade Industrial Nylon Plugs	6017
Weather-Resistant Straight Blade Plug Boot, High Visibility Yellow Rubber. For 15A & 20A Straight Blade Industrial Nylon Plugs	6017-Y
Weather-Resistant Straight Blade Connector Boot, Black Rubber. For 15A & 20A Straight Blade Industrial Nylon Connectors	6018
Weather-Resistant Straight Blade Connector Boot, High Visibility Yellow Rubber. For 15A & 20A Straight Blade Industrial Nylon Connectors	6018-Y

All devices are UL Listed and CSA Certified.

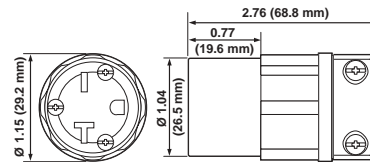

Cat. No. 5469-C

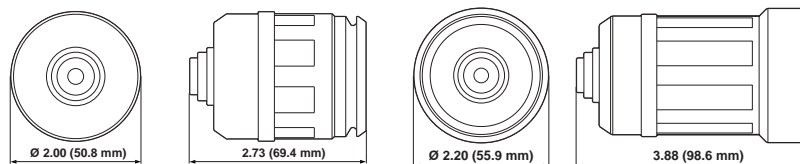

Cat. No. 6017

Cat. No. 6018

### SPECIFICATIONS & FEATURES

#### Hospital Grade

- Unmatched quality and performance confirmed by rigorous UL 498 testing
- Clearly identified by green dot

#### Industrial Grade

- Rugged construction resists impact, sunlight, chemicals and rough use
- All connector contacts are solid one-piece brass for superior conductivity
- Triple-wipe, heavy-duty power contacts set in deep pockets to resist damage
- Captive, color-coded brass #8 terminal screws
- Unique cord clamp accepts wide range of cable sizes, grips securely without tearing cord jackets: 10-3ST-18-3SVT (.245"- .700")

### TESTING & CODE COMPLIANCE

- Meet NEMA WD 1 & 6, ANSI requirements
- UL Listed & meets Fed. Spec. requirements: Industrial Plugs & Connectors (File #13393); Hospital Grade (UL 498, File # E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 65°C

For more information regarding corrosion-resistant devices refer to Corrosion Resistant Devices, Section K.