

## Surface Mount Jacks

### Type 103 Surface Mount Modular Jack with 110-Type Termination

**A** The 103 single-port surface mount jack is available in 4-, 6-, or 8-conductor configurations for voice and data. Mounts using screws or doublesided tape (both included), or optional magnets (see page S21). UL Listed and CSA Certified.

#### Type 103 Single-Port Surface Mount Modular Jack U S

DESCRIPTION	IVORY	WHITE
6-Position, 4-conductor Jack	41034-IDA	—
6-Position, 6-conductor Jack	41036-IDA	—
8-Position, 8-conductor USOC Jack	41038-IDA	—
8-Position, 8-conductor T568B Category 3 compliant Jack	41038-IDB	41038-WDB

### Type 104 Duplex Surface Mount Modular Jack with 110-Type Termination

**B** The 104 Duplex Surface Mount Jack accommodates two voice and/or data ports. Available in 4-, 6-, or 8-conductor configurations for voice and data. Mounts easily using screws or doublesided tape (both included), or optional magnets (see page S21). UL Listed and CSA Certified.

#### Type 104 Duplex Surface Mount Modular Jack U S

DESCRIPTION	PORT DESIGNATIONS		IVORY
Two 4-Conductor Jacks	Line 1	Line 2	41044-IDA
Two 6-Conductor Jacks	Line 1	Line 2	41046-IDA
One 6-Conductor Jack and one 8-conductor T568B Category 3 compliant jack	Voice	Data	41086-IDB
Two 8-Conductor USOC Jacks	Line 1	Line 2	41048-IDA
Two 8-Conductor T568B Category 3 compliant Jacks	Line 1	Line 2	41048-IDB
Two 8-Conductor T568B Category 3 compliant Jacks, one keyed and one non-keyed	Data	Data	41088-IDB

### Type 625A2 Surface Mount Jack

**C** The compact design of this "biscuit block" jack offers improved appearance and space savings for surface-mount applications, and includes many features to facilitate installation. Unit comes with your choice of modular jacks prewired to combo-head screw terminals. High-reliability features include retainer comb to assure proper contact between jack and plug. Self-tapping screws and adhesive pad are included. UL Listed and CSA Certified.

#### Type 625A2 Surface Mount Jack U S

DESCRIPTION	IVORY	WHITE	GRAY
6-Position 4-Conductor	4625A-24I	4625A-24W	—
6-Position 6-Conductor	4625A-26I	4625A-26W	—
8-Position 8-Conductor	40278-I	40278-W	40278-G



#### MATERIAL CHARACTERISTICS

##### 103 Jacks


- Housings: High-impact, fire-retardant plastic rated UL 94V0.
- Spring wire contacts: Phosphor bronze, plated with 50 microinches gold over 100 microinches nickel.
- 110 clips: Solder-plated phosphor bronze.



#### MATERIAL CHARACTERISTICS

##### 104 Jacks

- Housings: High-impact, fire-retardant plastic rated UL 94V0.
- Spring wire contacts: Phosphor bronze, plated with 50 microinches gold over 100 microinches nickel.
- 110 clips: Solderplated phosphor bronze.

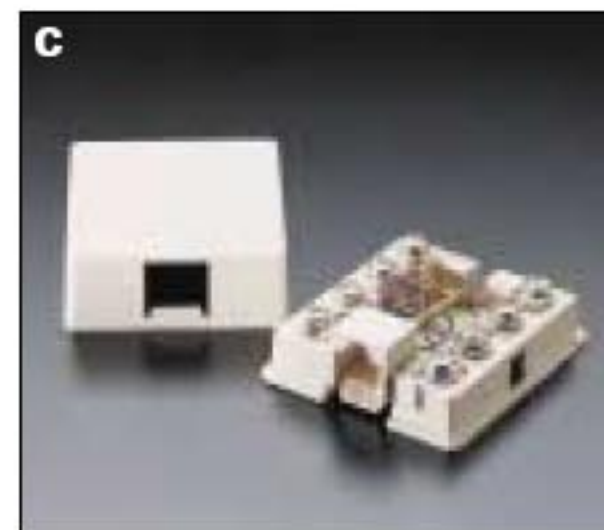

Sold by:



<http://www.TWAcomm.com>  
Toll Free: (877) 892-2666