

Industrial Grade



Straight Blade Plugs and Connectors



Wetguard™ Devices Engineered to IP66 & IP67 Watertight Standards

Wetguard™ Straight Blade Plugs and Connectors

Sold by:

TWAcComm.com
<http://www.TWAcComm.com>
 Toll Free: (877) 892-2666

DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
High-Visibility Yellow, 15A-125V 2-Pole, 3-Wire	14W47 NEMA 5-15P	15W47 NEMA 5-15R
Black, 15A-125V 2-Pole, 3-Wire	14W47-B NEMA 5-15P	15W47-B NEMA 5-15R
High-Visibility Yellow, 15A-250V 2-Pole, 3-Wire	14W49 NEMA 6-15P	15W49 NEMA 6-15R
High-Visibility Yellow, 20A-125V 2-Pole, 3-Wire	14W33 NEMA 5-20P	15W33 NEMA 5-20R CSA config. in Canada
High-Visibility Yellow, 20A-250V 2-Pole, 3-Wire	14W48 NEMA 6-20P	15W48 NEMA 6-20R CSA config. in Canada



Straight Blade Cord Sets—15 AMP 125V 2-Pole, 3-Wire Grounding

DESCRIPTION	CAT. NO. 14/3 SOOW	CAT. NO. 12/3 SOOW	NEMA 5-15P	NEMA 5-15R
25' Yellow Cord, Yellow Device★	W515-43A	W515-23A		
50' Yellow Cord, Yellow Device★	W515-43B	W515-23B		
100' Yellow Cord, Yellow Device★	W515-43C	W515-23C		

Replacement Closure Cap

DESCRIPTION	CAT. NO.
Replacement Female Closure Cap for use with 15A & 20A 2-pole, 3-wire devices	50W50





Dustguard™ Devices Engineered to IP44 Splashproof and Dust-Tight Standards

Dustguard™ Straight Blade Plugs and Connectors

DESCRIPTION	CAT. NO. PLUG	CAT. NO. CONNECTOR
High-Visibility Yellow, 15A-125V 2-Pole, 3-Wire	1447 NEMA 5-15P	1547 NEMA 5-15R
High-Visibility Yellow, 15A-250V 2-Pole, 3-Wire	1449 NEMA 6-15P	1549 NEMA 6-15R
High-Visibility Yellow, 20A-125V 2-Pole, 3-Wire	1433 NEMA 5-20P	1533 NEMA 5-20R CSA config. in Canada
High-Visibility Yellow, 20A-250V 2-Pole, 3-Wire	1448 NEMA 6-20P	1548 NEMA 6-20R CSA config. in Canada

All devices are UL Listed. Also CSA Certified except where indicated by★

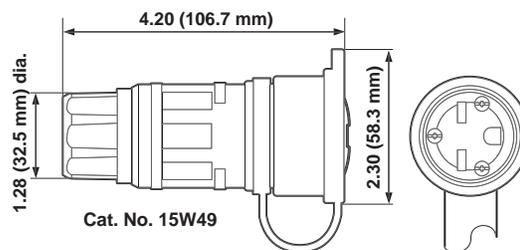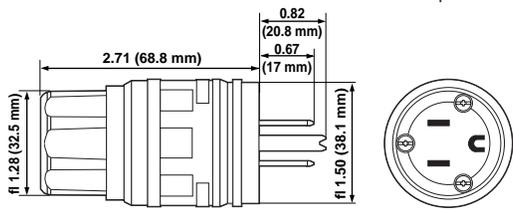

For more information regarding corrosion-resistant devices refer to Corrosion Resistant Devices, Section K.

SPECIFICATIONS & FEATURES

- Wetguard**
- IEC IP66 and IP 67 Rated, in accordance with IEC 529 as evaluated by UL and CSA
 - NEMA Type 4, 4X, 6 and 6P Ratings in accordance with UL 50 and CSA 94
 - Outstanding resistance to wet and damp environments, extreme temperature variations, acids, alkalis, grease, oils and solvents
 - Effective "tongue and groove" construction seals out water, moisture, dirt when plugs are mated with connectors
 - Innovative strain-relief grips cables securely, keeps out water and moisture
 - Cord clamp range: 18/3–10/3S0 (.375"–.655")
 - Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
 - Connector "hood" closure cap seals device when not in use
- Dustguard**
- IEC/IP44 Rated
 - Developed to withstand dusty and dirty environments, cracking and fading, temperature extremes
 - Rugged wiring modules have high performance 1-piece brass triple-wipe contacts, solid brass plug blades
 - Self centering cord clamp accepts wide range of conductors, 18-3 SVT–12-3SO (.240"–.655")

TESTING & CODE COMPLIANCE

- Meet NEMA WD 1 & 6, ANSI requirements
- UL Listed & meets Fed. Spec. requirements: Wetguard (File #13393), Dustguard (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
 Operating Temperature: -40°C to 65°C