

20 AMP Plugs, Angle Plugs, Armored Plugs and Connectors

20 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	520PV	Yellow	.245 – .655	No. 18-3 through No. 12-3 cords	 NEMA 5-20P
Armored Grounding Plug	520PA	Yellow Steel Armor			
PVC Grounding Connector	520CV	Yellow			
Armored Grounding Connector	520CA	Yellow Steel Armor			 NEMA 5-20R





20 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	620PV	Yellow	.245 – .655	No. 18-3 through No. 12-3 cords	 NEMA 6-20P
Armored Grounding Plug	620PA	Yellow Steel Armor			
PVC Grounding Connector	620CV	Yellow			
Armored Grounding Connector	620CA	Yellow Steel Armor			 NEMA 6-20R
Rubber Back Grounding Plug	620PR	Black			



All devices are UL Listed and CSA Certified.

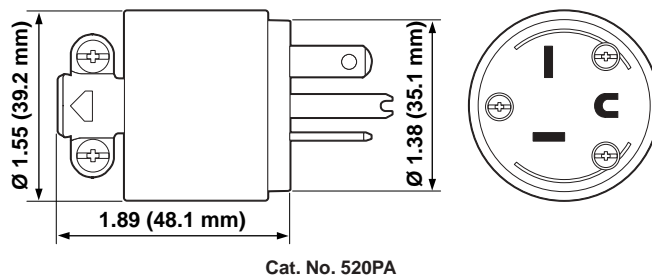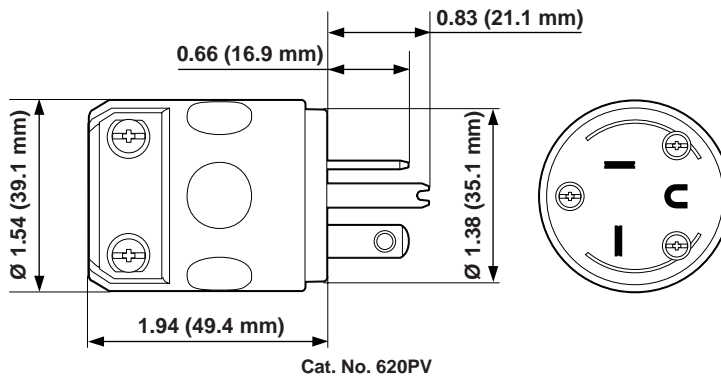

SPECIFICATIONS & FEATURES

- Triple-drive head screws — Standard, Philips, Robertson
- NEMA configuration number & rating molded on device for easy identification
- Dirt and moisture resistant
- Deep-slotted, backed out terminal screws draw backwire clamps securely for maximum conductivity
- Husk & module keyed for easy alignment during wiring
- Built-in cord grip adjusts automatically for use with No. 18-3 through No. 12-3 cords

PVC Plugs & Connectors

- Rugged PVC body resists moisture and chemicals; suited for outdoor cords
- Unique dimpled body design provides a secure grip
- Speed-thread assembly screws tighten with just a few quick turns

Armored Plugs & Connectors

- Ideal for shops, garages and rough-duty work with hard floors
- Two piece strain-relief clamp center cord for neat installation

TESTING & CODE COMPLIANCE

- Meet NEMA requirements
- UL Listed (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
 Operating Temperature: -40°C to 65°C.