



# Straight Blade Plugs and Connectors



## 10 AMP and 15 AMP Parallel Plugs and Connectors

10 AMP 125V w/18-2 SPT-1 Cord  
3 AMP 125V w/20-2XT Cord


DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Easy Wire Plug	123	Brown			
	123-I	Ivory			
	123-W	White			
Same as No. 123, Polarized	123-P*	Brown		No. 18-2SPT-1 or No. 20-2 XT Only	 
	123-PI*	Ivory			
	123-PW*	White			
	123-PE*	Black			

\*Packed 500 Bulk


## 15 AMP 125V 2-Pole, 2-Wire

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG
<b>Polarized Light Duty Clamptite Plug</b>	101 101-W 101-E	Brown White Black	Up to .250"	No. 20, 18, 16 Flat or Round	
<b>Note:</b> Consult factory for availability of non-polarized version					
<b>Polarized Light Duty Clamptite Connector</b>	102 102-W 102-E	Brown White Black	Up to .250"	No. 20, 18, 16 Flat or Round	
<b>Non-Polarized Heavy-Duty PVC Plug</b>	115PV	Yellow	.245-.655"	AWG 18-2 to 12-2 cable.	
<b>Non-Polarized Heavy-Duty TPE Rubber Plug</b>	115PR	Black			
<b>Non-Polarized Short Flat Vinyl Plug★</b>	48643 48643-W 48643 E	Brown White Black	.375 max.	18-14	1-15P Polarized 
<b>Polarized Angle Vinyl Plug★</b>	638 638-B 638-W	Black Brown White	.343 max.	16 max.	1-15R Polarized 
<b>Non-Polarized Round Vinyl Handle Plug, w/Cord Clamp★</b>	48646	Black	.437 max.	18-14	
<b>Non-Polarized Vinyl Connector, w/Cord Clamp★</b>	612†	Black	.437 max.	14 max.	
<b>Non-Polarized Round Vinyl Handle Plug, w/Spring Blades★</b>	48642	Black	.375 max.	18-14	

\*Packed 500 bulk. †Not UL Listed. For replacement use only.  
All devices are UL Listed. Also CSA Certified except where indicated by★

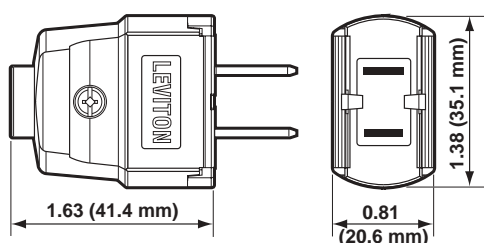

Cat. No. 101

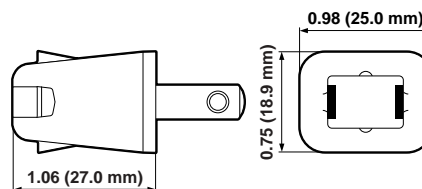

Cat. No. 123

## SPECIFICATIONS & FEATURES

- Brass plug blades and connector contacts for maximum conductivity
- Armored devices have heavily plated steel shields and cord clamps
- Vinyl devices resist chipping, cracking, oils, grease and acids
- Rubber devices resist cold, abrasion, grease, oils, acids and impact
- Plastic devices resist grease, oils and acids

## TESTING & CODE COMPLIANCE

- Meet NEMA requirements (1-15P)
- UL Listed (File #E-13393)
- CSA Certified
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

## MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94  
Operating Temperature: -40°C to 65°C

