

Straight Blade Plugs and Connectors

10 AMP and 15 AMP Parallel Plugs and Connectors

10 AMP 125V w/18-2 SPT-1 Cord
3 AMP 125V w/20-2XT Cord


DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Easy Wire Plug	123	Brown		No. 18-2SPT-1 or No. 20-2 XT Only	
	123-I	Ivory			
	123-W	White			
Same as No. 123, Polarized	123-P*	Brown			
	123-PI*	Ivory			
	123-PW*	White			
	123-PE*	Black			

*Packed 500 Bulk


15 AMP 125V 2-Pole, 2-Wire

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Polarized Light Duty Clamptite Plug	101	Brown	Up to .250"	No. 20, 18, 16 Flat or Round	
	101-W	White			
	101-E	Black			
Note: Consult factory for availability of non-polarized version					
Polarized Light Duty Clamptite Connector	102	Brown White Black	Up to .250"	No. 20, 18, 16 Flat or Round	
Non-Polarized Heavy-Duty PVC Plug	115PV	Yellow	.245-.655"	AWG 18-2 to 12-2 cable.	
Non-Polarized Heavy-Duty TPE Rubber Plug	115PR	Black			
Non-Polarized Short Flat Vinyl Plug*	48643	Brown	.375 max.	18-14	
	48643-W	White			
	48643 E	Black			
Polarized Angle Vinyl Plug*	638	Black	.343 max.	16 max.	
	638-B	Brown			
	638-W	White			
Non-Polarized Round Vinyl Handle Plug, w/Cord Clamp*	48646	Black	.437 max.	18-14	
Non-Polarized Vinyl Connector, w/Cord Clamp*	612†	Black	.437 max.	14 max.	
Non-Polarized Round Vinyl Handle Plug, w/Spring Blades*	48642	Black	.375 max.	18-14	

Packed 500 bulk. †Not UL Listed. For replacement use only. All devices are UL Listed. Also CSA Certified except where indicated by

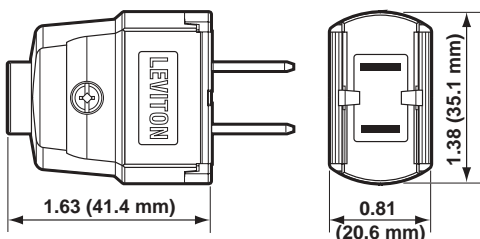

Cat. No. 101

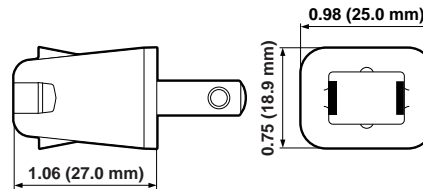

Cat. No. 123

- ### SPECIFICATIONS & FEATURES
- Brass plug blades and connector contacts for maximum conductivity
 - Armored devices have heavily plated steel shields and cord clamps
 - Vinyl devices resist chipping, cracking, oils, grease and acids
 - Rubber devices resist cold, abrasion, grease, oils, acids and impact
 - Plastic devices resist grease, oils and acids

- ### TESTING & CODE COMPLIANCE
- Meet NEMA requirements (1-15P)
 - UL Listed (File #E-13393)
 - CSA Certified
 - NOM Certified (#057)
 - Backed by a Limited Two-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
Operating Temperature: -40°C to 65°C

