


Clean-Thread Screws


The #12-24 Combination Pan Head, Pilot Point Mounting Screws attach equipment to racks and cabinets. A cutting notch in the thread removes paint in threaded holes to improve metal-to-metal contact. The pilot point reduces cross-threading. The combination head can be used with #3 Phillips and slotted screwdrivers.

- Zinc finish
- Available in packages of 50 and 1,000

| Part Number | Description | Unit | Shipping Weight lb (kg) |
|-------------|---------------|-------|-------------------------|
| 40605-001 | #12-24 Screws | 50 | 1 (0.5) |
| 40605-004 | #12-24 Screws | 1,000 | 9 (4.1) |

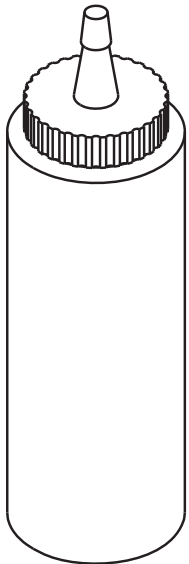

8 oz (230 g)



.5 oz (14 g)

Aluminum-To-Aluminum Or Aluminum-To-Copper Antioxidant Joint Compound

Recommended for all aluminum-to-aluminum and aluminum-to-copper connectors, bare conductors, Busbars, insulated conductors and conduit threads.

| Part Number | Description | Size oz (g) | Unit | Shipping Weight lb (kg) |
|-------------|-------------------|-------------|------|-------------------------|
| 40166-101 | Antioxidant, Gray | .5 (14) | 1 | 1 (0.5) |
| 40166-801 | Antioxidant, Gray | 8 (230) | 1 | 1 (0.5) |
| 40166-150 | Antioxidant, Gray | .5 (14) | 50 | 2 (0.9) |
| 40166-812 | Antioxidant, Gray | 8 (230) | 12 | 6 (2.7) |

- Oxide inhibiting joint compound is used to improve the electrical conductivity and enhance the integrity of any grounding or bonding connection
- Good for all voltages
- Assures a high-connectivity joint by sealing out air and moisture to prevent corrosion and reformation of oxide film
- Also used as an anti-seizing thread lubricant and ensures continuity of ground on aluminum conduit threads
- Bulk packaging quantities available

Copper-To-Copper Joint Compound

Recommended for all copper-to-copper connections, copper threads and all mechanical/pressure type grounding connections.

| Part Number | Description | Size | Unit | Shipping Weight lb (kg) |
|-------------|---------------------|-------|------|-------------------------|
| 40168-101 | Antioxidant, Copper | .5 oz | 1 | 1 (0.5) |
| 40168-801 | Antioxidant, Copper | 8 oz | 1 | 1 (0.5) |
| 40168-150 | Antioxidant, Copper | .5 oz | 50 | 2 (0.9) |
| 40168-812 | Antioxidant, Copper | 8 oz | 12 | 6 (2.7) |