


Sold by:



North American Watertight Mechanical Interlocks Non-Fused & Fused

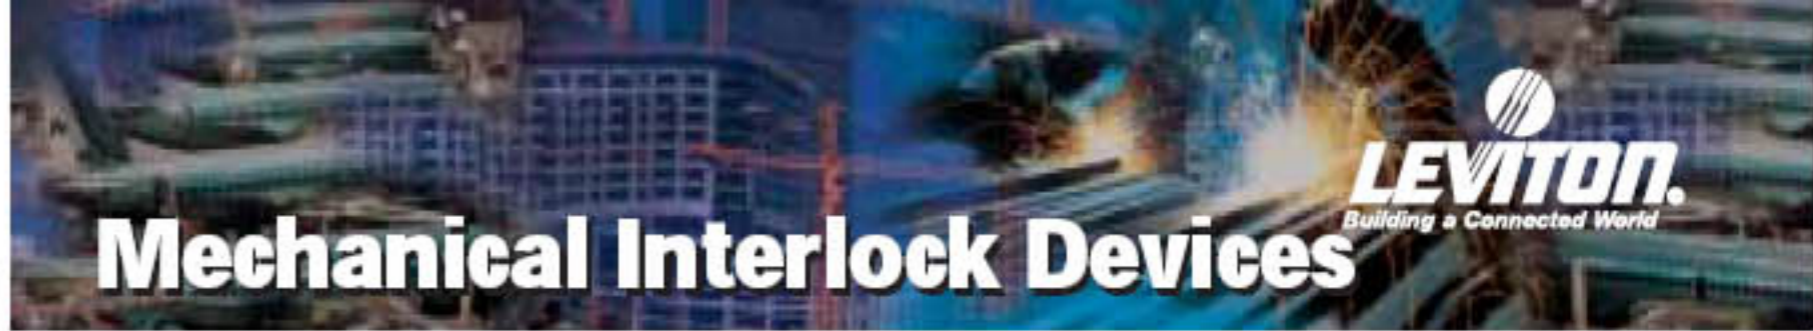

Fused Models Accept
 "Class J" Time-Delay
 Fuses



Engineered to IP67
 Watertight Standards

**2 YEAR LIMITED
 WARRANTY**

Type 3R, 4X & 12K IP67

AMPS	WIRING	VOLTAGE AC	RECEPTACLE CONFIG.	PLUG CONFIG.	560MI7W		NON-FUSED		FUSED	
					MECHANICAL INTERLOCK	HP RATING	MECHANICAL INTERLOCK	HP RATING	USE PLUG CAT. NO.	
60	2p3w	240			360MI6W	10	360MF6W	*	360P6W	
	2p3w	480			360MI7W	20	-	-	360P7W	
	3p4w	125/250			460MI12W	*	460MF12W	*	460P12W	
	3p4w	3Ø240			460MI9W	20	460MF9W	15	460P9W	
	3p4w	3Ø480			460MI7W	40	460MF7W	30	460P7W	
	3p4w	3Ø600			460MI5W	40	460MF5W	50	460P5W	
	4p5w	3ØY120/208			560MI9W	20	560MF9W	15	560P9W	
	4p5w	3ØY277/480			560MI7W	40	-	-	560P7W	
	4p5w	3ØY347/600			560MI5W	40	-	-	560P5W	

Type 3R, 4X & 12K IP67

AMPS	WIRING	VOLTAGE AC	RECEPTACLE CONFIG.	PLUG CONFIG.	NON-FUSED		
					MECHANICAL INTERLOCK	HORSEPOWER RATING	USE PLUG CAT. NO.
100	2p3w	125			3100MI4W	5	3100P4W
	2p3w	240			3100MI6W	15	3100P6W
	2p3w	480			3100MI7W	25	3100P7W
	3p4w	125/250			4100MI12W	*	4100P12W
	3p4w	3Ø240			4100MI9W	30	4100P9W
	3p4w	3Ø480			4100MI7W	50	4100P7W
	3p4w	3Ø600			4100MI5W	50	4100P5W
	4p5w	3ØY120/208			5100MI9W	25	5100P9W
	4p5w	3ØY277/480			5100MI7W	50	5100P7W
	4p5w	3ØY347/600			5100MI5W	50	5100P5W

* Consult factory for your specific application.