



Sold by:



15 AMP Locking Devices

15 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4550			
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired	4550-IG			
Single Flush Receptacle	4560**			
Single Flush Receptacle, w/Short Strap	4560-SS			
Single Flush Receptacle, Isolated Ground	4560-IG**			
Single Flush Receptacle, Isolated Ground, w/Short Strap	4560-SIG			
Locking Plug, Black Nylon Body	4570-C	.245-.700	10-18	L6-15R
Angle Locking Plug, Black Nylon Body	4570-CA	.245-.700	10-18	L6-15P
Locking Plug, Yellow Nylon Body	4570-CY	.245-.700	10-18	
Locking Connector, Black Nylon Body	4579-C	.245-.700	10-18	
Locking Connector, Yellow Nylon Body	4579-CY	.245-.700	10-18	
Locking Flanged Outlet	4585-C			
Locking Flanged Inlet	4586-C			



15 AMP 277V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4750			
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired	4570-IG			
Single Flush Receptacle	4760**			
Single Flush Receptacle, w/Short Strap	4760-SS			
Single Flush Receptacle, Isolated Ground	4760-IG**			
Single Flush Receptacle, Isolated Ground, w/Short Strap	4760-SIG			
Locking Plug, Black Nylon Body	4770-C	.245-.700	10-18	L7-15R
Lighted Locking Plug, Black Nylon Body	4770-PLC	.245-.700	10-18	L7-15P
Angle Locking Plug, Black Nylon Body	4770-CA	.245-.700	10-18	
Locking Plug, Yellow Nylon Body	4770-CY	.245-.700	10-18	
Locking Connector, Black Nylon Body	4779-C	.245-.700	10-18	
Locking Connector, Yellow Nylon Body	4779-CY	.245-.700	10-18	
Lighted Locking Connector, Black Nylon Body	4779-PLC	.245-.700	10-18	
Locking Flanged Outlet	4785-C			
Locking Flanged Inlet	4786-C			



**Uses stainless steel wallplate, Cat. No. 84004-40. For additional wallplate selections, please see Section G. For Corrosion Resistant Locking Devices, please check pages K2-K5. Weather-Resistant Boots for 15A Locking Plugs and Connectors are listed on page J20. All devices are UL Listed and CSA certified.



4570-CA



4579-C

SPECIFICATIONS & FEATURES



- Locking Receptacles feature a complete range of ratings and NEMA configurations, including isolated ground and non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

TESTING & CODE COMPLIANCE



- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. 4550, 4560, 4585-C, 4750, 4760, 4785-C; File #E-13393 — Cat. Nos. 4570, 4579, 4586-C, 4770, 4779, 4786-C)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements
Operating Temperature: -40°C to 60°C

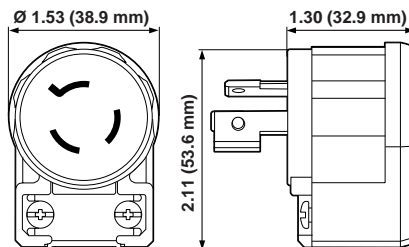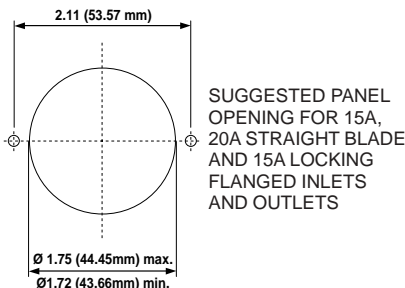

ANGLE LOCKING PLUG
Cat. No. 4570-CA

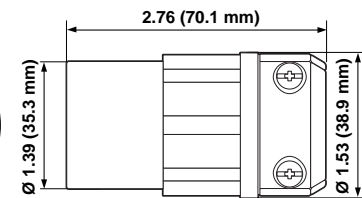

LOCKING CONNECTOR
Cat. No. 4579-C