



30 AMP Non-NEMA Locking Devices

30 AMP 125V/250 3-Pole 3-Wire Non-Grounding Non-NEMA†

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	3330**			
Locking Plug★	3331-C	.385-.860	10-18	 NON-NEMA
Locking Connector★	3333-C	.385-.860	10-18	
Locking Flanged Inlet★	3334-C			
Locking Flanged Outlet★	3335-C			

†Effective July 1, 1981, rating for non-grounding versions was changed from 30A-250V to comply with UL requirements. Add (-G) for grounding devices: (-G) devices are rated 30A-250V and are no longer UL Listed — for replacement use only.

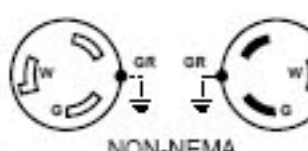
30 AMP 3ØY 120V/208V 4-Pole 4-Wire Non-Grounding Non-NEMA††

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	3430**			
Locking Plug★	3431-C	.595-1.150	10-18	 NON-NEMA
Locking Connector★	3433-C	.595-1.150	10-18	
Locking Flanged Inlet★	3434-C			
Locking Flanged Outlet★	3435-C			


††Effective July 1, 1981, rating for non-grounding versions was changed from 30A-250V AC/DC, 30A-600V AC to comply with UL requirements. Add (-G) for grounding devices: (-G) devices are rated 30A-250V AC/DC, 30A-600V AC and are no longer UL Listed — for replacement use only.

50 AMP Non-NEMA Locking Devices

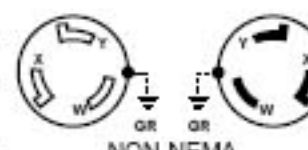
50 AMP 250V DC/600V AC 2-Pole 3-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	3771*			
Locking Plug★	3763-C	.680-1.125	10-4	 NON-NEMA
Locking Connector★	3762-C	.680-1.125	10-4	
Locking Flanged Inlet★	3777			

50 AMP 250V DC/600V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	7379*			
Locking Plug★	7765-C	.680-1.125	10-4	 NON-NEMA
Locking Connector★	7764-C	.680-1.125	10-4	

50 AMP 250V DC/600V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	3769*			
Locking Plug★	3765-C	.680-1.125	10-4	 NON-NEMA
Locking Connector★	3764-C	.680-1.125	10-4	
Locking Flanged Inlet★	3775			

Receptacle Cover

DESCRIPTION	CAT. NO.
Weather-protective die-cast aluminum receptacle cover with lift lid for Cat. Nos. 3769, 3771 and 7379★	7770

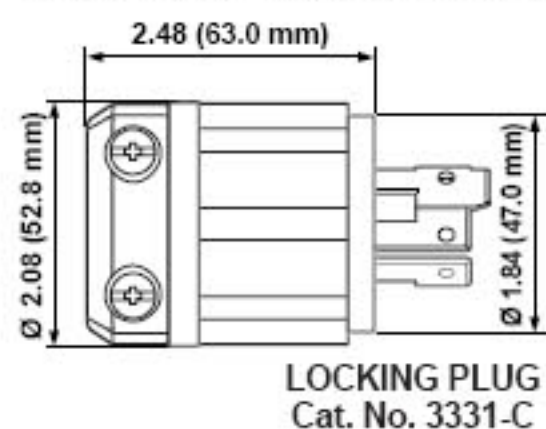
*Uses Weatherproof Cover, Cat. No. 7788-CR or 7770.

For Corrosion Resistant Locking Devices, please check pages K2-K5.

Weather-Resistant Boots for 30A Locking Plugs and Connectors are listed on page J20.

**Uses stainless steel wallplate, Cat. No. 84020-40. For additional wallplate selections, please see Section G.

All devices are UL Listed. Also CSA certified except where indicated by ★



SPECIFICATIONS & FEATURES

- Locking Receptacles feature a complete range of ratings and Non-NEMA configurations, including isolated ground and non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

TESTING & CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. 3330, 3335-C, 3530, 3535-C, 3771, 7379, 3769; File #E-13393 — Cat. Nos. 3331-C, 3333-C, 3334-C, 3431-C, 3433-C, 3434-C, 3763-C, 3762-C, 3777, 7765-C, 7764-C, 3765-C, 3764-C, 3775)
- CSA Certified (LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements

Operating Temperature: -40°C to 60°C

