

# Industrial Grade


# Midget Locking Devices

Sold by:



## 15 AMP 125V 2-Pole 2-Wire Non-Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Midget Locking Plug	ML1-P	.218-.43	18-14	NEMA ML1
Angle Plug	ML1-AP	.218-.43	18-14	
Midget Locking Connector	ML1-C	.218-.43	18-14	NEMA ML1
Angle Connector	ML1-AC	.218-.43	18-14	
Plastic Midget Locking Flanged Inlet	ML1-PB			
Plastic Midget Locking Flanged Outlet	ML1-PER			
Metal Inlet	ML1-MB			
Metal Outlet	ML1-MER			



NEMA ML1



ML1-P

## 15 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Midget Locking Plug	ML2-P	.218-.43	18-14	NEMA ML2
Angle Plug	ML2-AP	.218-.43	18-14	
Midget Locking Connector	ML2-C	.218-.43	18-14	NEMA ML2
Angle Connector	ML2-AC	.218-.43	18-14	
Plastic Midget Locking Flanged Inlet	ML2-PB			
Plastic Midget Locking Flanged Outlet	ML2-PER			
Metal Inlet	ML2-MB			
Metal Outlet	ML2-MER			



NEMA ML2



ML1-C

## 15 AMP 125/250V 3-Pole 3-Wire Non-Grounding★

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Midget Locking Plug	ML3-P	.218-.43	18-14	NEMA ML3
Angle Plug	ML3-AP	.218-.43	18-14	
Midget Locking Connector	ML3-C	.218-.43	18-14	NEMA ML3
Angle Connector	ML3-AC	.218-.43	18-14	
Plastic Midget Locking Flanged Inlet	ML3-PB			
Plastic Midget Locking Flanged Outlet	ML3-PER			
Metal Inlet	ML3-MB			
Metal Outlet	ML3-MER			



NEMA ML3

### SPECIFICATIONS & FEATURES

- Offer a smaller form factor for limited-space applications
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

### TESTING & CODE COMPLIANCE


- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed. Spec. Listed WC-596 (File No. E-13393)
- CSA Certified (File No. LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

### MATERIAL CHARACTERISTICS


Environmental: Flammability per UL94 or CSA C22/06 Requirements  
 Operating Temperature: -40°C to 60°C

## 15 AMP 125V 2-Pole 2-Wire Non-Grounding


DESCRIPTION	CAT. NO. PLUG	CAT. NO. ANGLE PLUG	NEMA CONFIG.
Midget Straight Blade Plug Black & White Nylon	MS2-P	MS2-AP	NEMA MS2-P



All devices are UL Listed. Also CSA certified except where indicated by★

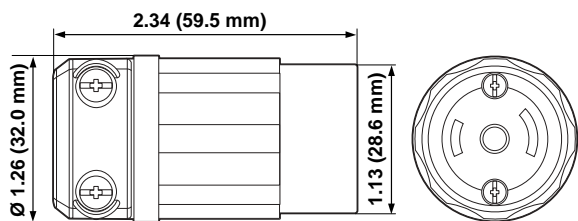

MIDGET LOCKING CONNECTOR  
Cat. No. ML2-C

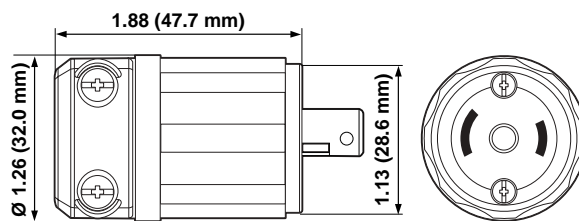

MIDGET LOCKING PLUG  
Cat. No. ML2-P