

## Feed-Through Cord Switches

### 3 AMP 125V 1/2 H.P. 125V


DESCRIPTION	CAT. NO.	SEQUENCE	COLOR*
Heavy Duty, Single Pole, 18/2 – 16/2 Type SPT-1, SPT-2 or Round Cord 18/2, Type SVT and other cords up to 9/32" outer jacket.	5410	ON-OFF	I, W

## Miniature Feed-Through Cord Switch

### 6 AMP 125V 3 AMP 125VT 3 AMP 250V

DESCRIPTION	CAT. NO.	COLOR*
Miniature Single Pole, ON-OFF Sequence, Captive Screw. For use with #18 ga. SPT-1 conductors	423-3	I, W

All devices are UL Listed and CSA Certified.

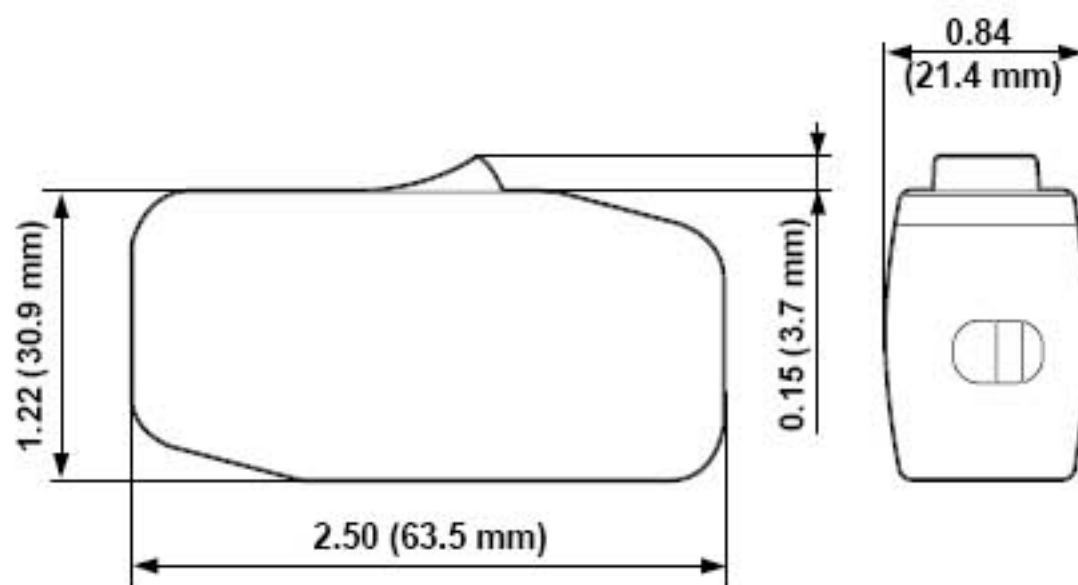

FEED-THROUGH SWITCH  
Cat. No. 5410

#### TESTING & CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)

#### \*COLOR

Basic Cat. No. denotes Brown. Add the suffix to catalog number as follows for additional color selections: Ivory (-I), White (-W).

#### MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 120°C

Sold by:

