

# Industrial Grade

# Corrosion Resistant Devices



## 15 AMP Devices

### 15 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
<b>Straight Blade Plug, Yellow Nylon Body and Cord Clamp</b>	52CM-66C	5-15P
<b>Straight Blade Connector, Yellow Nylon Body and Cord Clamp</b>	52CM-69C	5-15R
<b>Duplex Receptacle, Smooth Face, One-Piece Electroless Nickel-Plated Brass Strap*</b>	52CM-62	5-15R
<b>Single Receptacle, Smooth Face, Yellow Nylon Body†</b>	5261-CR	5-15R
<b>Locking Plug, Yellow Nylon Body and Cord Clamp</b>	47CM-20C	L5-15P
<b>Locking Connector, Yellow Nylon Body and Cord Clamp</b>	47CM-29C	L5-15R
<b>Single Locking Flush Receptacle†</b>	47CM-10	L5-15R



52CM-66C

### 15 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
<b>Single Receptacle, Smooth Face, Yellow Nylon Body†</b>	5661-CR	6-15R
<b>Locking Plug, Yellow Nylon Body and Cord Clamp</b>	45CM-70C	L6-15P
<b>Locking Connector, Yellow Nylon Body and Cord Clamp</b>	45CM-79C	L6-15R
<b>Single Locking Flush Receptacle†</b>	45CM-60	L6-15R



47CM-29C

### 15 AMP 277V AC 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
<b>Single Locking Flush Receptacle†</b>	47CM-60	L7-15R

### Boots and Covers for 15 AMP Corrosion Resistant Devices

DESCRIPTION	CAT. NO.
<b>15A Straight Blade Plug Boot, black</b>	6017
<b>15A Straight Blade Plug Boot, High Visibility Yellow</b>	6017-Y
<b>15A Straight Blade Connector Boot, Black</b>	6018
<b>15A Straight Blade Connector Boot, High Visibility Yellow</b>	6018-Y
<b>15A Locking Plug Boot, Black</b>	6017-L
<b>15A Locking Plug Boot, High Visibility Yellow</b>	6017-LY
<b>15A Locking Connector Boot, Black</b>	6018-L
<b>15A Locking Connector Boot, High Visibility Yellow</b>	6018-LY
<b>Water-Resistant Flip Lid Cover, Gray Lexan. For use with 15A and 20A straight blade and 15A locking 3-wire FI and FO</b>	WP1

\*UL Corrosion Resistant. Meets standards for UL Hospital Grade Listing and Federal Specification WC-596 requirements. Uses stainless steel wallplate Cat. No. 84003-40.  
 †Uses stainless steel wallplate Cat. No. 84004-40. For additional wallplate selections, please see Section G.  
 All devices are UL Listed and CSA Certified.

### SPECIFICATIONS & FEATURES


- All metal parts (blades, contacts, terminals and screws) are electroless nickel-coated
- Cord clamp seats flush with body for all cable sizes from 10-3 ST to 18-3 SVT (.245"-.700"), providing positive strain relief while preventing damage to cable jacket
- Captive, brass #8 terminal screws are color coded for easy wiring identification: green (ground), brass (hot) and silver (neutral)
- Super tough nylon plug and connector body is bright yellow for easy corrosion resistant identification
- Connector power contacts are heavy-duty, solid, one-piece brass, triple-wipe, set in deep pockets to resist rough use
- Heavy-duty, impact-resistant, super tough ST801 all-nylon body construction; fluted body design provides sure grip
- Wire clamp moves in individual chamber to provide positive crimp lock without cutting wire strands

### TESTING & CODE COMPLIANCE


- Plugs and connectors pass the ASTM B117-13 five-hundred hour Salt Spray (Fog) Test with no visible corrosion
- Designed to meet or exceed UL Fed Spec. Listing WC-596. UL Listed (File # E-13399 for receptacles; File # E-13393 for plugs and connectors)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Meets NEMA WD1 & WD6 requirements
- NEMA configuration and rating molded on front
- Backed by a Limited 10-Year Warranty

### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
 Operating Temperature: -40°C (without impact) to 60°C maximum continuous

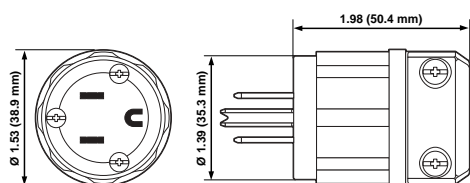

**STRAIGHT BLADE PLUG**  
Cat. No. 52CM-66C

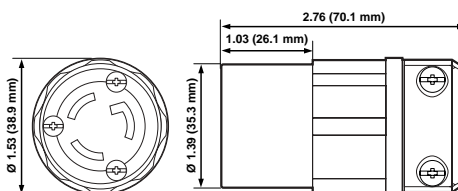

**LOCKING CONNECTOR**  
Cat. No. 47CM-29C