


## 30 AMP Devices

### 30 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Locking Plug, Yellow Nylon Body and Cord Clamp	26CM-11	L5-30P
Locking Connector, Yellow Nylon Body and Cord Clamp	26CM-13	L5-30R
Single Locking Flush Receptacle†	26CM-10	L5-30R
Power Inlet, 316 Stainless Steel with Threaded Cap	SS303	L5-30R



### 30 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Locking Plug, Yellow Nylon Body and Cord Clamp	26CM-21	L6-30P
Locking Connector, Yellow Nylon Body and Cord Clamp	26CM-23	L6-30R
Single Locking Flush Receptacle†	26CM-20	L6-30R



### 30 AMP 125/250V 3-Pole 4-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Single Locking Flush Receptacle†	27CM-10	L14-30R



### 30 AMP 3Ø 250V 3-Pole 4-Wire Grounding


DESCRIPTION	CAT. NO.	NEMA CONFIG.
Single Locking Flush Receptacle†	27CM-20	L15-30R




### Boots and Covers for 30 AMP Corrosion-Resistant Devices

DESCRIPTION	CAT. NO.
3-Wire, 30A Locking Plug Boot, Black	6031
3-Wire, 30A Locking Plug Boot, High Visibility Yellow	6031-Y
3-Wire, 30A Locking Connector Boot, Black	6032
3-Wire, 30A Locking Connector Boot, High Visibility Yellow	6032-Y
Weather-Resistant Flip Lid Cover, high visibility yellow. For 20A and 30A single locking receptacles and FS/FD boxes.	7420-CR
Weather-Resistant Flip Lid Cover gray. For 20A and 30A 3-, 4-, and 5-wire locking FI and FO; also 30A and 50A 3-wire power receptacles	WP2

†Uses stainless steel wallplate Cat. No. 84020-40. For additional wallplate selections, please see Section G. All devices are UL Listed and CSA Certified.

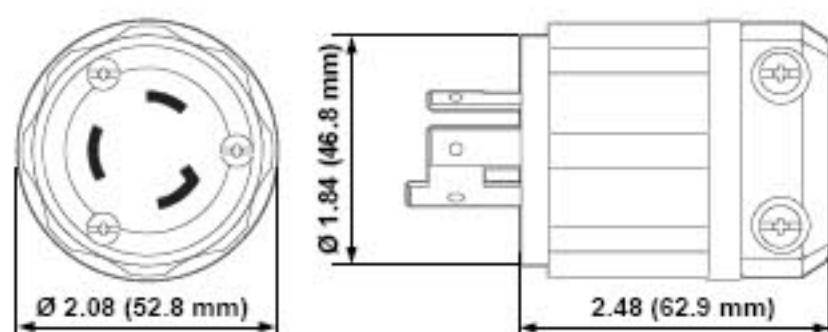

LOCKING PLUG  
Cat No. 26CM-11

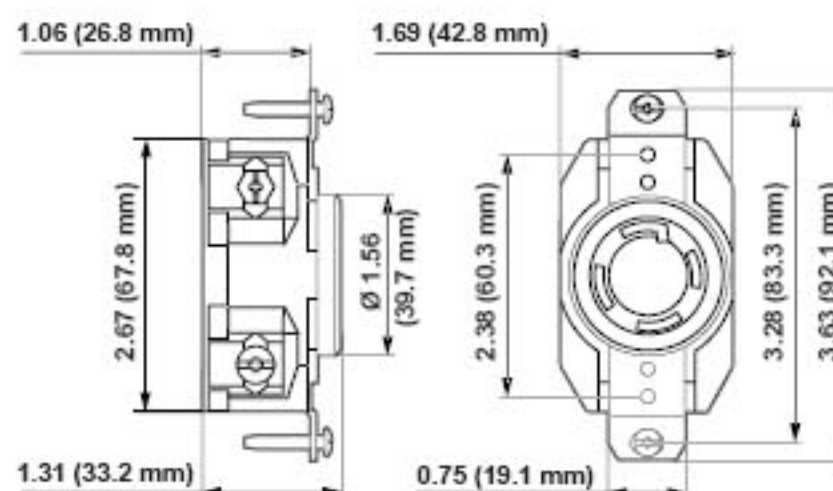

SINGLE LOCKING FLUSH RECEPTACLE  
Cat No. 27CM-20



SS303



26CM-11

### SPECIFICATIONS & FEATURES

- All current-carrying metal parts (blades, contacts, terminals and screws) are electroless nickel-coated
- Cord clamp ranges: Locking Plug: 20A, 3-wire & 30A, 3-wire (.385 to .780"); 20A, 4/5-wire (.595 to .895"); 30A, 4/5-wire (.595 to 1.150"), providing positive strain relief while preventing damage to cable jacket
- Captive, brass #8 terminal screws are color coded for easy wiring identification: green (ground), brass (hot) and silver (neutral)
- Nylon plug and connector body is bright yellow for easy corrosion resistant identification
- Connector power contacts are heavy-duty, solid, one-piece brass, triple-wipe, set in deep pockets to resist rough use
- Heavy-duty, impact-resistant, all-nylon body construction; fluted body design provides sure grip
- Wire clamp moves in individual chamber to provide positive crimp lock without cutting wire strands

### TESTING & CODE COMPLIANCE

- Plugs and connectors pass the ASTM B117-13 five-hundred hour Salt Spray (Fog) Test with no visible corrosion
- Designed to meet or exceed UL Fed Spec. Listing WC-596. UL Listed (File # E-13399 for receptacles; File # E-13393 for plugs and connectors)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Meets NEMA WD1 & WD6 requirements
- NEMA configuration and rating molded on front
- Backed by a Limited 10-Year Warranty

### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C (without impact) to 60°C maximum continuous