


GN Netcom



How can you get two headsets for the price of one? Get the GN Netcom Stratus Ultra-G™. By giving you a choice of headband and ear capsule styles, plus the ability to switch from one style to the other in seconds, Stratus Ultra-G's the one for versatility and value. Stratus Ultra-G also features our patented earlobe hinge, for a custom, on-the-ear fit. Soft foam ear cushions for all-day wearability. And a flexible non-kink microphone boom, for long-term durability and reliability. If you want comfort, convenience, clarity and cost-effectiveness, you want Stratus Ultra-G.

- Noise-canceling microphone
- Two wearing styles
- Swivel-mount receiver
- Flexible microphone boom
- Adjustable Lobe Hinge™
- Lightweight, yet durable
- Two-year "No Fine Print" warranty

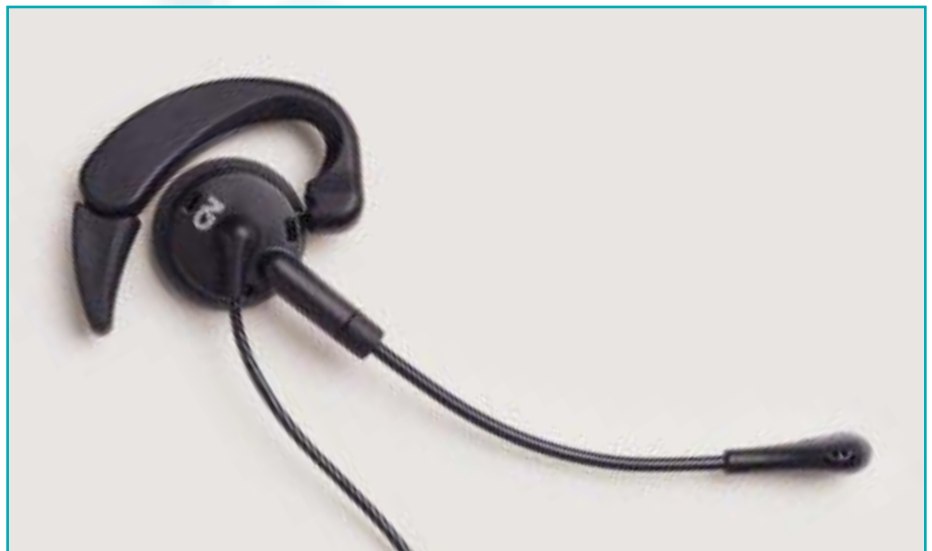

STRATUS ULTRA-G


THE ULTRA-POPULAR CONVERTIBLE HEADSET.

Sold by:



GN Netcom, Inc.

The Stratus Ultra-G convertible headset lets you choose either our Adjustable Lobe Hinge for confident on-the-ear comfort, or a slender headband, for over-the-ear stability. And its noise-canceling microphone delivers uninterrupted call clarity.



Stratus Ultra ST-I



The Stratus Ultra-G comes complete with headband, ear capsule, ear cushions and windscreen.

There's a GN Netcom amplifier for every need and every application. Like our headsets, all GN Netcom amplifiers feature a two-year warranty.



The MPA-II Multi-Purpose Amplifier works on most phone systems with a modular handset connector. The easiest amplifier to set up and use, it features a sliding volume control, headset/handset switch, mute switch and a built-in headset stand. An optional on-line indicator signals when the headset is in use.



Our 0686 In-line Amplifiers provide a cost-effective option for standard carbon applications. Incredibly compact, they feature a rotary wheel for a broad range of volume adjustments. Also available with a mute button, **0686M**.



The 0452 Two-Prong Amplifier is designed for telephones equipped with a two-prong headset port. Its 3-position volume control locks your volume preference in place.

Also available: The 0911 Two-Prong 6-Wire Amplifier, for push-to-talk dispatch/911 environments; and the HT One Headset Telephone (HT-1), the first professional-quality telephone with an integrated headset—ideal for PBX and CTI applications.

Standard Features	ST-I
Universal Telephone Interface	Δ
Noise-Canceling Microphone	Δ
Flexible Microphone Boom	Δ
Swivel Mount Receiver	Δ
Adjustable Lobe Hinge™	Δ
Multiple Wearing Styles	Δ
GN Netcom-compatible Quick Disconnect	Δ
Two-Year "No Fine Print" Warranty	Δ
Great Sound, Comfort, Durability	Δ

Transmit Specifications	
Microphone:	Noise-canceling electret
Frequency Response:	300-3000 Hz
Distortion:	Less than 5%
Current Consumption:	250 μa @ 3 V (DC)
Operating Voltage:	1.5-10 V (DC)

Receive Specifications	
Speaker:	Dynamic
Input Impedance:	300 ohms (typical)
Frequency Response:	300-3,300 Hz
Automatic Gain Control Threshold Level with amplifier:	-41 dBV with an input at 1 kHz
Volume Control Range:	18 dB (typical)
Maximum Output:	114 dB spl peak unit

General Specifications	
Operating Temperature:	0°-50° C
Polarity:	Non-polar in amplified applications
Dielectric Withstand Voltage:	5,000 V AC or 7,000 V DC
Safety:	Registered to UL 1459 FCC Parts 68 Registered OSHA Part 1910 subpart S CSA C22.2 No. 225-M90

GN Netcom, Inc.

For more information:

Printed in USA.
10/99
GNI-134A



GN Netcom, Inc.
77 Northeastern Blvd. Nashua NH 03062
1-800-826-4656 www.gnnetcom.com