

## 20 AMP Locking Devices

### 20 AMP 3ØY 277/480V 4-Pole 4-Wire Non-Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Single Flush Receptacle★	2450†			
Locking Plug, Black Nylon Body★	2451	.595-.895	10-18	L19-20R
Locking Connector, Black Nylon Body★	2453	.595-.895	10-18	
Locking Flanged Inlet★	2455			L19-20P
Locking Flanged Outlet★	2456			

### 20 AMP 3ØY 347/600V 4-Pole 4-Wire Non-Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Single Flush Receptacle★	2460†			
Locking Plug, Black Nylon Body★	2461	.595-.895	10-18	L20-20R
Locking Connector, Black Nylon Body★	2463	.595-.895	10-18	
Locking Flanged Inlet★	2465			L20-20P
Locking Flanged Outlet★	2466			

### 20 AMP 3ØY 120/208V 4-Pole 5-Wire Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Single Flush Receptacle	2510†			
Single Flush Receptacle, Isolated Ground	2510-IG†			L21-20R
Locking Plug, Black Nylon Body	2511	.595-.895	10-18	
Locking Connector, Black Nylon Body	2513	.595-.895	10-18	L21-20P
Locking Flanged Inlet	2515			
Locking Flanged Outlet	2516			

### 20 AMP 3ØY 277/480V 4-Pole 5-Wire Grounding

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Single Flush Receptacle	2520†			
Single Flush Receptacle, Isolated Ground	2520-IG†			L22-20R
Locking Plug, Black Nylon Body	2521	.595-.895	10-18	
Locking Connector, Black Nylon Body	2523	.595-.895	10-18	L22-20P
Locking Flanged Inlet	2525			
Locking Flanged Outlet	2526			

†Uses stainless steel wallplate, Cat. No. 84020-40. For additional wallplate selections, please see Section G.  
 For Corrosion Resistant Locking Devices, please check pages K2-K5  
 Weather-Resistant Boots for 20A Locking Plugs and Connectors are listed on page J20  
 All devices are UL Listed. Also CSA certified except where indicated by ★



### SPECIFICATIONS & FEATURES



- Locking Receptacles feature a complete range of ratings and NEMA configurations, including isolated ground and non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

### TESTING & CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed. Spec. Listed WC-596 (File #13399 – Cat. Nos. 2450, 2456, 2460, 2466, 2510, 2516, 2520, 2526; File #13393 – Cat. Nos. 2451, 2453, 2455, 2461, 2463, 2465, 2511, 2513, 2515, 2521, 2523, 2525)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

### MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements  
 Operating Temperature: -40°C to 60°C

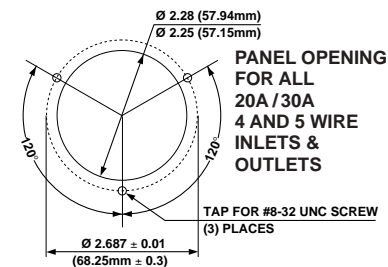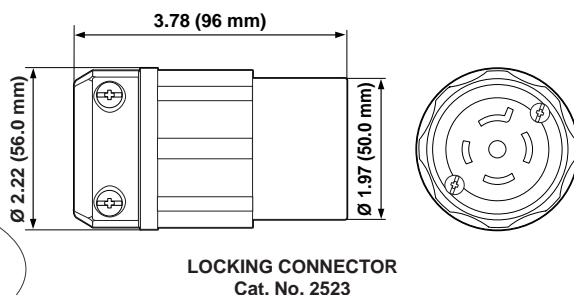

Sold by:  
  
<http://www.TWAcomm.com>  
 Toll Free: (877) 892-2666