



19 Series — Ball Nose — Up to 690 AMP,* 600V

*Refer to Ampacity Chart for all cable sizes on page JJ2

Male Vulcanized Plug—Crimped (Cable Size: 250–350MCM)

COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	19V21-E	19V21-C	19SVM-E
White	19V21-W	19V21-C	19SVM-W
Red	19V21-R	19V21-C	19SVM-R
Blue	19V21-B	19V21-C	19SVM-B
Green	19V21-G	19V21-C	19SVM-G
Yellow	19V21-Y	19V21-C	19SVM-Y
Orange	19V21-O	19V21-C	19SVM-O
Brown	19V21-H	19V21-C	19SVM-H

Female Vulcanized Plug—Crimped (Cable Size: 250–350MCM)

COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	19V24-E	19V24-C	19SVF-E
White	19V24-W	19V24-C	19SVF-W
Red	19V24-R	19V24-C	19SVF-R
Blue	19V24-B	19V24-C	19SVF-B
Green	19V24-G	19V24-C	19SVF-G
Yellow	19V24-Y	19V24-C	19SVF-Y
Orange	19V24-O	19V24-C	19SVF-O
Brown	19V24-H	19V24-C	19SVF-H

Male Vulcanized Plug—Crimped (Cable Size: 350–500MCM)


COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	19V22-E	19V22-C	19SVM-E
White	19V22-W	19V22-C	19SVM-W
Red	19V22-R	19V22-C	19SVM-R
Blue	19V22-B	19V22-C	19SVM-B
Green	19V22-G	19V22-C	19SVM-G
Yellow	19V22-Y	19V22-C	19SVM-Y
Orange	19V22-O	19V22-C	19SVM-O
Brown	19V22-H	19V22-C	19SVM-H

Female Vulcanized Plug—Crimped (Cable Size: 350–500MCM)


COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	19V25-E	19V25-C	19SVF-E
White	19V25-W	19V25-C	19SVF-W
Red	19V25-R	19V25-C	19SVF-R
Blue	19V25-B	19V25-C	19SVF-B
Green	19V25-G	19V25-C	19SVF-G
Yellow	19V25-Y	19V25-C	19SVF-Y
Orange	19V25-O	19V25-C	19SVF-O
Brown	19V25-H	19V25-C	19SVF-H

SPECIFICATIONS & FEATURES

- The 19 Series Ball Nose connectors are designed for general industrial applications

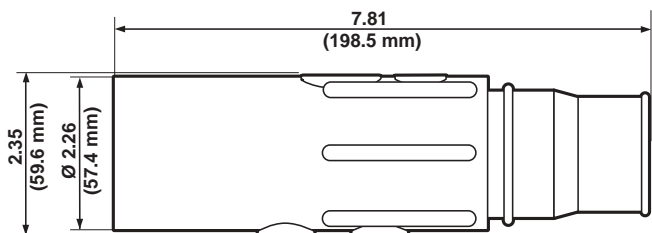

MALE VULCANIZED PLUG—CRIMPED
Cat. No. 19V21 and Cat. No. 19V22

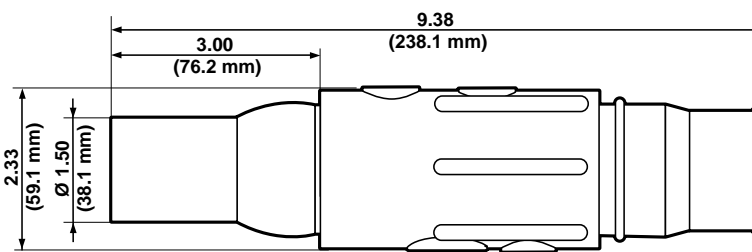

FEMALE VULCANIZED PLUG—CRIMPED
Cat. No. 19V24 and Cat. No. 19V25