



23CM-11

SPECIFICATIONS & FEATURES

- All current-carrying metal parts (blades, contacts, terminals and screws) are electroless nickel-coated
- Cord clamp seats flush with body for all cable sizes from 10-3 ST to 18-3 SVT (.245"-.700"), providing positive strain relief while preventing damage to cable jacket
- Captive, brass #8 terminal screws are color coded for easy wiring identification: green (ground), brass (hot) and silver (neutral)
- Super tough nylon plug and connector body is bright yellow for easy corrosion resistant identification
- Connector power contacts are heavy-duty, solid, one-piece brass, triple-wipe, set in deep pockets to resist rough use
- Heavy-duty, impact-resistant, all-nylon body construction; fluted body design provides sure grip
- Wire clamp moves in individual chamber to provide positive crimp lock without cutting wire strands

TESTING & CODE COMPLIANCE

- Plugs and connectors pass the ASTM B117-13 five-hundred hour Salt Spray (Fog) Test with no visible corrosion
- Designed to meet or exceed UL Fed Spec. Listing WC-596. UL Listed (File # E-13399 for receptacles; File # E-13393 for plugs and connectors)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Meets NEMA WD1 & WD6 requirements
- NEMA configuration and rating molded on front
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
 Operating Temperature: -40°C (without impact) to 60°C maximum continuous


*UL Corrosion Resistant. Meets standards for UL Hospital Grade Listing and Federal Specification WC-596 requirements.

Uses stainless steel wallplate Cat. No. 84003-40.

**Uses stainless steel wallplate Cat. No. 84004-40.

†Uses stainless steel wallplate Cat. No. 84020-40. For additional wallplate selections, please see Section G.

All devices are UL Listed and CSA Certified.

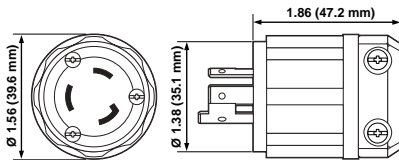

LOCKING PLUG
 Cat No. 23CM-11C

20 AMP Devices

20 AMP 125V 2-Pole 3-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|---|----------|--------------|
| Straight Blade Plug, Yellow Nylon Body and Cord Clamp | 53CM-66C | 5-20P |
| Straight Blade Connector, Yellow Nylon Body and Cord Clamp | 53CM-69C | 5-20R |
| Duplex Receptacle, smooth face. One Piece Electroless Nickel-Plated Brass Strap* | 53CM-62 | 5-20R |
| Single Receptacle, Smooth Face, Yellow Nylon Body** | 5361-CR | 5-20R |
| Locking Plug, Yellow Nylon Body and Cord Clamp | 23CM-11 | L5-20P |
| Locking Connector, Yellow Nylon Body and Cord Clamp | 23CM-13 | L5-20R |
| Single Locking Flush Receptacle† | 23CM-10 | L5-20R |

20 AMP 250V 2-Pole 3-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|--|----------|--------------|
| Single Receptacle, Smooth Face, Yellow Nylon Body** | 5461-CR | 6-20R |
| Single Locking Flush Receptacle† | 23CM-20 | L6-20R |

20 AMP 277V AC 2-Pole 3-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|---|----------|--------------|
| Single Locking Flush Receptacle† | 23CM-30 | L7-20R |

20 AMP 125/250V 3-Pole 4-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|---|----------|--------------|
| Single Locking Flush Receptacle† | 24CM-10 | L14-20R |

20 AMP 3Ø 250V 3-Pole 4-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|---|----------|--------------|
| Single Locking Flush Receptacle† | 24CM-20 | L15-20R |

20 AMP 3Ø 480V 3-Pole 4-Wire Grounding

| DESCRIPTION | CAT. NO. | NEMA CONFIG. |
|---|----------|--------------|
| Single Locking Flush Receptacle† | 24CM-30 | L16-20R |

Boots and Covers for 20 AMP Corrosion Resistant Devices

| DESCRIPTION | CAT. NO. |
|---|----------|
| 20A Straight Blade Plug Boot, Black | 6017 |
| 20A Straight Blade Plug Boot, High Visibility Yellow | 6017-Y |
| 20A Straight Blade Connector, Black | 6018 |
| 20A Straight Blade Connector, High Visibility Yellow | 6018-Y |
| 3-Wire 20A Locking Plug Boot, Black | 6031 |
| 3-Wire 20A Locking Plug Boot, High Visibility Yellow | 6031-Y |
| 3-Wire 20A Locking Connector Boot, Black | 6032 |
| 3-Wire 20A Locking Connector Boot, High Visibility Yellow | 6032-Y |
| Weather-Resistant Flip Lid Cover, high visibility yellow. | 7420-CR |
| For 20A and 30A single locking receptacles and FS/FD boxes | |
| Weather-Resistant Flip Lid Cover gray. For 20A and 30A 3-, 4-, and 5-wire locking FI and FO; also 30A and 50A 3-wire power receptacles | WP2 |