2004

9063

SPECIFICATIONS & FEATURES

- Medium-to-Medium Extenders available in phenolic and porcelain
- Pony Cleat Receptacles have open wiring terminals
- Two-piece surface-type lampholders have concealed wiring terminals with wireways for top and continuous wiring

TESTING & CODE COMPLIANCE

- UL Listed (File #E-3810; E-13396)
- CSA Certified (File #LR-1863)

Socket Extensions — Single Circuit

Medium–Medium

DESCRIPTION	CAT. NO.	RATING
2-Piece Porcelain; Mounting Hole 1⅜" Dia. Extension 1¼"*	2004	660W 250V
1-Piece Porcelain; Slotted Mounting Hole 1⅜" Dia. Extension 1¼"*	2005	660W 250V
1-Piece Phenolic. Extension 1 3/16"**	2006	660W 250V

*To be used with porcelain sockets only
**To be used with phenolic sockets only

Mogul-Mogul

DESCRIPTION	CAT. NO.	RATING
1-Piece Porcelain. Extension 2⅜"	8647	1500W 600V

Socket Adapter

Mogul-To-Porcelain Medium

DESCRIPTION	CAT. NO.	RATING
1-piece. Meets Fed. Spec. W-L-142a	8681	660W 250V
Same as above, except 4 KV Pulse-Rated	8681-400	660W 250V 4 KV Pulse-Rated

Appliance Heating Receptacle

Porcelain Two-Piece

DESCRIPTION	CAT. NO.	RATING
2-piece Heating Receptacle. Gasket Furnished	8110	660W 250V

Porcelain and Phenolic Lampholders

Pony Cleat Type

DESCRIPTION	CAT. NO.	RATING	OD	OH	C
Candelabra Base; Plastic. Not UL Listed★	10028	75W 125V	1 7/16	7/8	1 1/8
Miniature Base, Plastic. Not UL Listed★	10020	75W 125V	1 5/16	7/8	31/32
Medium Base, Phenolic	9063	660W 250V	1 7/8	1½	1 5/16
Medium Base, Porcelain	19062	660W 250V	1 7/8	1½	1 5/16

Surface Type

DESCRIPTION	CAT. NO.	RATING	OD	OH	C
Medium Base; Porcelain; Low 2-Piece	9880	660W 250V	2 5/16	1½	1⅜
Medium Base; Porcelain; High 2-Piece★	9882	660W 250V	2 5/16	1 7/8	1⅜

All devices are UL Listed. Also CSA Certified except where indicated by★

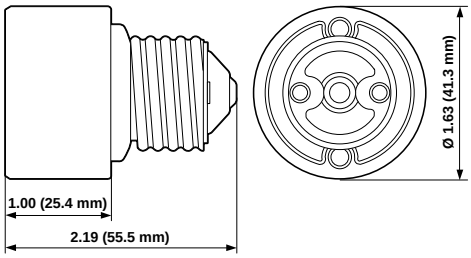

Cat No. 2005

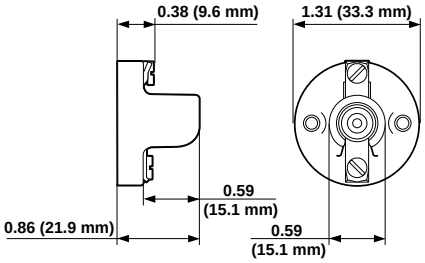

Cat. No. 10020

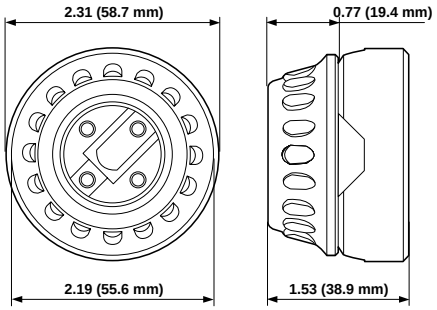

Cat. No. 9880