

Medium Base Multi-Lampholder Clusters

Treated Aluminum Screw Shell

DESCRIPTION	CAT. NO.	RATING	T	TA	B	BA	OAH T+B
2-Light Twin 1/8 IPS Male Top Bracket Only	4020-A3A	660W 250V	15/16	5/16	—	—	—
2-Light Twin 1/8 IPS Male (top & bottom)	4015-D4F	660W 250V	11/16	5/16	11/16	7/16	33/8
2-Light Offset 1/8 IPS Male (top & bottom)	4032-E5F	660W 250V	13/4	5/16	13/4	7/16	311/16
3-Light 1/8 IPS Male (top & bottom)	341-D4U	660W 250V	13/4	1/2	13/4	7/16	31/2
2-Light Offset 1/8 IPS Male (top); Pullchain Switch (bottom) with 1/2" usable shank*	4034-F5A	660W 250V 1A 125V T	13/4	5/16	115/16	1/2	33/4 ⁺
2-Light Twin 1/8 IPS Male (top); Pullchain Switch (bottom) 3/8" usable shank*	4017-D2F	660W 250V 1A 125V T	11/16	5/16	11/16	3/8	213/16 ⁺

⁺Includes nut.

Leads are No. 18 AWG 105°C plastic; 9" long, stripped 3/4"; untinned and pulled through top bracket.

Porcelain Par Connectors


DESCRIPTION	CAT. NO.	RATING
Medium Base for PAR #46 and #38 lamps. Leads are No. 14 AWG 200°C SEW-2 Silicone Rubber Insulated; 18" Long, Stripped 3/4". Others available on inquiry	368-1	660W 125V
Mogul Base for PAR #56 and #64 lamps. Leads are No. 14 150°C SEWF-2; 18" Long, Stripped 3/4". Others available upon request	357-8	1000W 125V

Bayonet Socket — Single Contact

Candelabra Base

DESCRIPTION	CAT. NO.	RATING
Flat Bracket. Leads are No. 18 AWG, 105°C Plastic; 6" Long, Stripped 3/4" (one black, one white)*	905	Low Voltage

All devices are UL Listed except Cat. No. 905. Also CSA Certified except where indicated by★

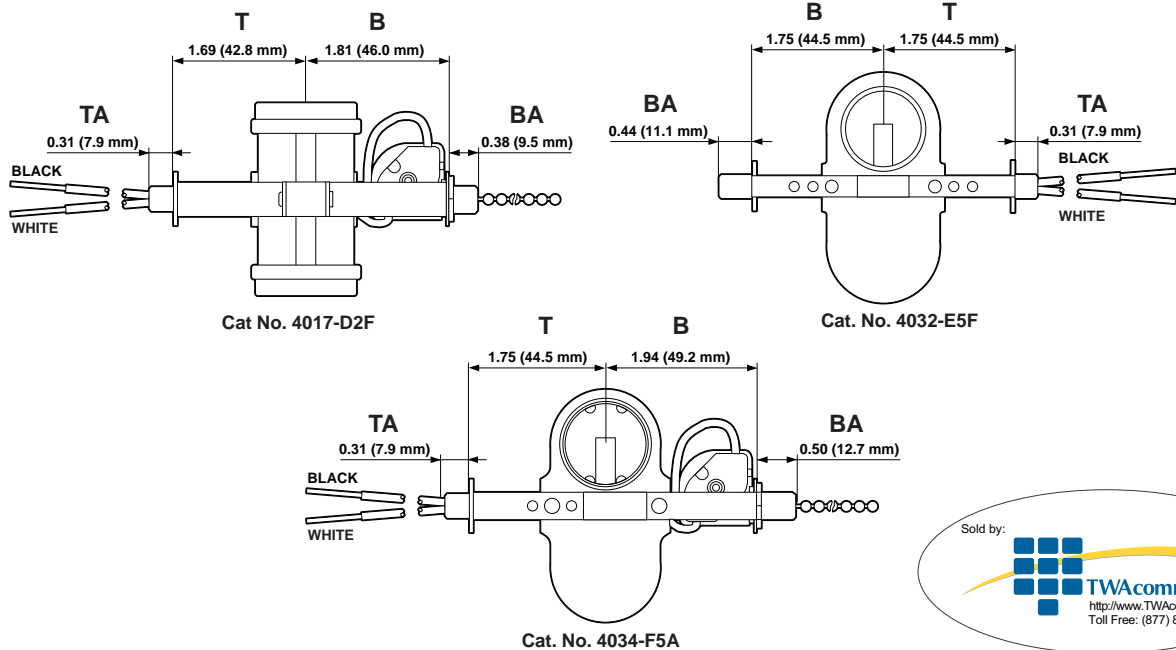

SPECIFICATIONS & FEATURES

- Pull chain models have bell at end of chain on 3 foot cord
- Medium and Candelabra bases
- Par connectors have white, unglazed porcelain body

TESTING & CODE COMPLIANCE

- UL Listed (File #E-13405)
- CSA Certified (File #LR-5863)