

## Medium Base Multi-Lampholder Clusters

*Treated Aluminum Screw Shell*

DESCRIPTION	CAT. NO.	RATING	T	TA	B	BA	OAH T+B
<b>2-Light Twin 1/8 IPS Male Top Bracket Only</b>	4020-A3A	660W 250V	15/16	5/16	—	—	—
<b>2-Light Twin 1/8 IPS Male (top &amp; bottom)</b>	4015-D4F	660W 250V	111/16	5/16	111/16	7/16	33/8
<b>2-Light Offset 1/8 IPS Male (top &amp; bottom)</b>	4032-E5F	660W 250V	13/4	5/16	13/4	7/16	311/16
<b>3-Light 1/8 IPS Male (top &amp; bottom)</b>	341-D4U	660W 250V	13/4	1/2	13/4	7/16	31/2
<b>2-Light Offset 1/8 IPS Male (top); Pullchain Switch (bottom) with 1/2" usable shank*</b>	4034-F5A	660W 250V 1A 125V T	13/4	5/16	115/16	1/2	33/4 <sup>+</sup>
<b>2-Light Twin 1/8 IPS Male (top); Pullchain Switch (bottom) 3/8" usable shank*</b>	4017-D2F	660W 250V 1A 125V T	11/16	5/16	111/16	3/8	213/16 <sup>+</sup>

<sup>+</sup>Includes nut.

Leads are No. 18 AWG 105°C plastic; 9" long, stripped 3/4"; untinned and pulled through top bracket.

## Porcelain Par Connectors


DESCRIPTION	CAT. NO.	RATING
<b>Medium Base for PAR #46 and #38 lamps. Leads are No. 14 AWG 200°C SEW-2 Silicone Rubber Insulated; 18" Long, Stripped 3/4". Others available on inquiry</b>	368-1	660W 125V
<b>Mogul Base for PAR #56 and #64 lamps. Leads are No. 14 150°C SEWF-2; 18" Long, Stripped 3/4". Others available upon request</b>	357-8	1000W 125V

## Bayonet Socket — Single Contact

*Candelabra Base*

DESCRIPTION	CAT. NO.	RATING
<b>Flat Bracket. Leads are No. 18 AWG, 105°C Plastic; 6" Long, Stripped 3/4" (one black, one white)*</b>	905	Low Voltage

All devices are UL Listed except Cat. No. 905. Also CSA Certified except where indicated by★

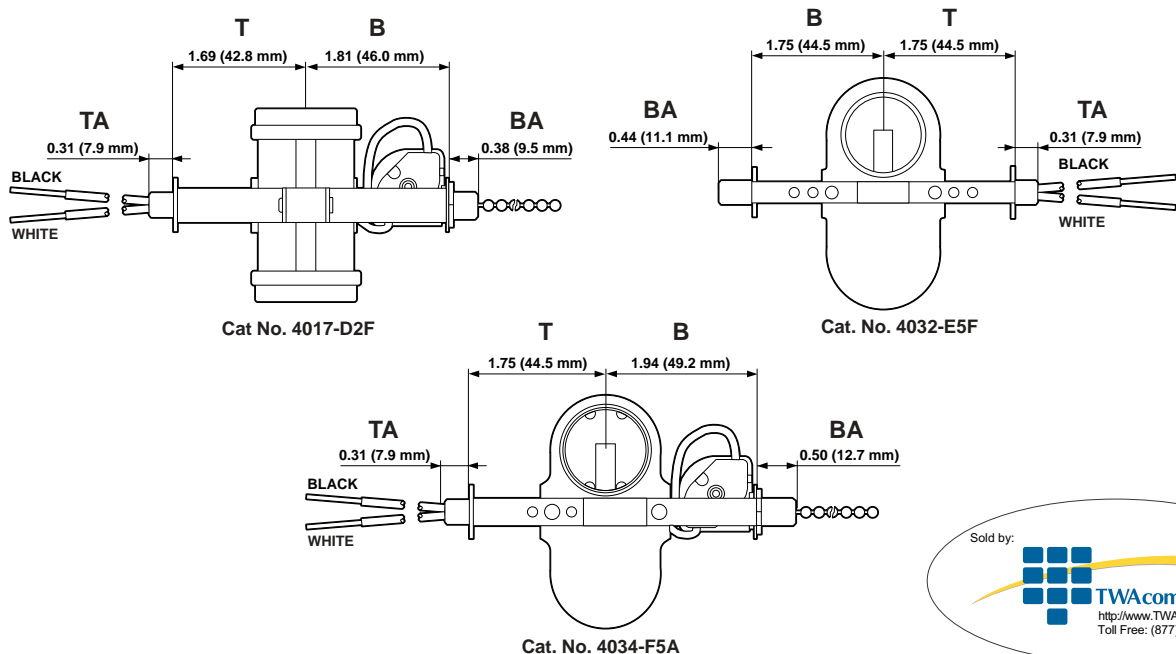

### SPECIFICATIONS & FEATURES

- Pull chain models have bell at end of chain on 3 foot cord
- Medium and Candelabra bases
- Par connectors have white, unglazed porcelain body

### TESTING & CODE COMPLIANCE

- UL Listed (File #E-13405)
- CSA Certified (File #LR-5863)